
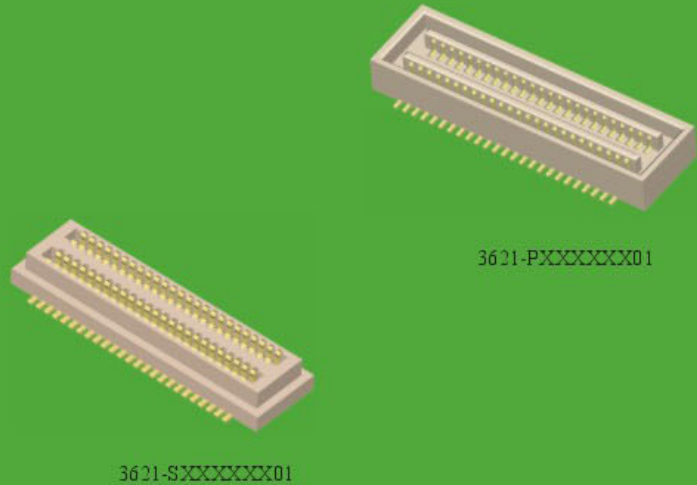


0.50mm Board To Board

SPECIFICATIONS

Current Rating: 0.5AMP
 Contact Resistance: 30m Ω Max.
 Insulation Resistance: 100M Ω Min.
 Withstanding Voltage :50V AC/Minute
 Operation Temperature: -20°C to +105°C
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: LCP+30%GF

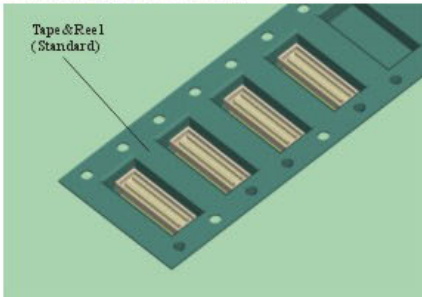

3621- X XX XX XX 01


TYPE
 P-PLUG
 S-SOCKET

INSULATOR HEIGHT
 PLUG=H1
 SOCKET=H2

NO.OF PINS PER ROW
 25:25PIN
 30:30PIN
 40:40PIN
 50:50PIN


CONTACT PLATING
 G0:1u" Gold S0:1u" Gold/Tin
 G1:3u" Gold S1:3u" Gold/Tin
 G2:5u" Gold S2:5u" Gold/Tin
 G3:10u"Gold S3:10u"Gold/Tin
 G4:15u"Gold S4:15u"Gold/Tin
 G5:30u"Gold S5:30u"Gold/Tin
 G6:20u"Gold S6:20u"Gold/Tin
 SN: Tin

PLUG SERIES

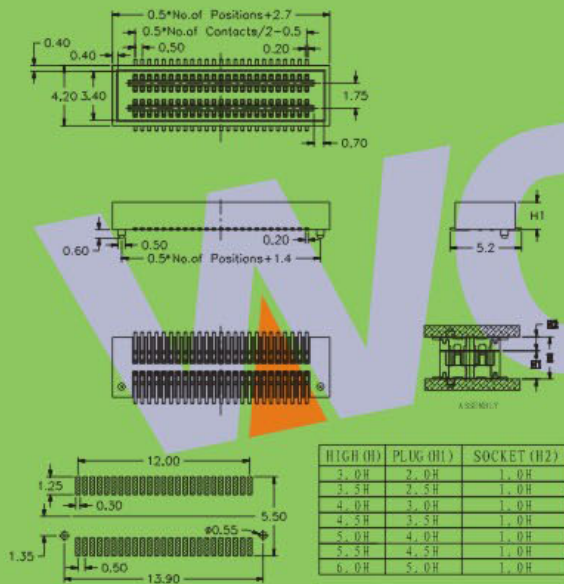

Recommended P.C.B Layout (Top Side)

SOCKET SERIES

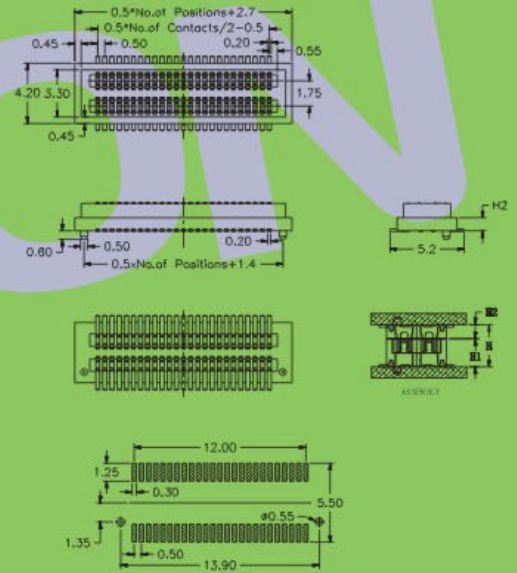

Recommended P.C.B Layout (Top Side)

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418