



# 0.50mm Board To Board

## SPECIFICATIONS

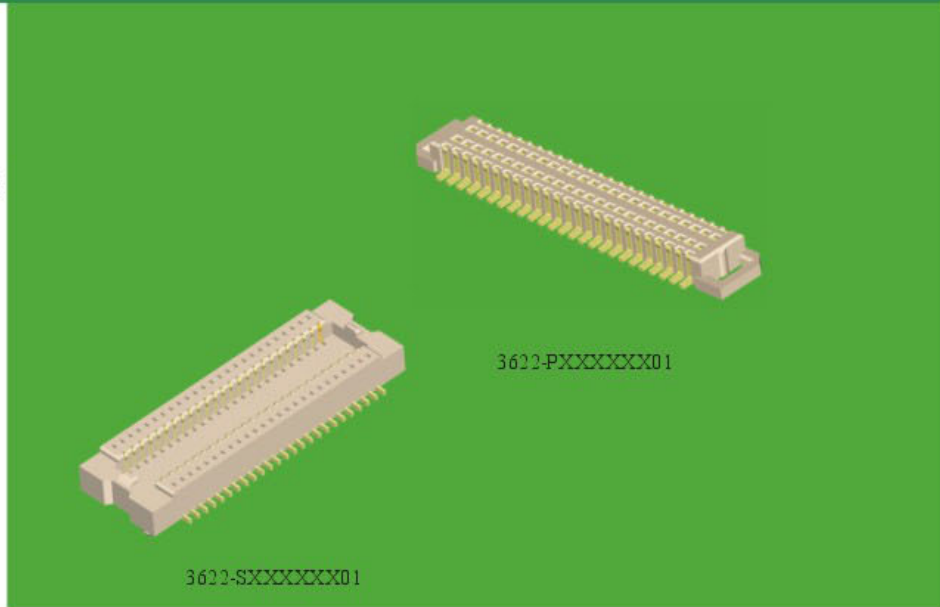

Current Rating: 0.5AMP  
 Contact Resistance: 30m Ω Max.  
 Insulation Resistance: 100M Ω Min.  
 Withstanding Voltage : 50V AC/Minute  
 Operation Temperature: -20°C to +105°C  
 Contact Material: Phosphor Bronze  
 Contact plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: LCP+30%GF

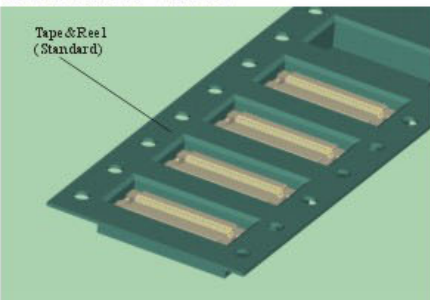


**3622- X XX XX XX 01**

**TYPE**  
 P: PLUG  
 S: SOCKET

**INSULATOR HEIGHT**  
 PLUG=H1  
 SOCKET=H2

**NO. OF PINS PER ROW**  
 25: 25PIN  
 30: 30PIN  
 40: 40PIN  
 50: 50PIN

**CONTACT PLATING**  
 G0: 1u" Gold S0: 1u" Gold/Tin  
 G1: 3u" Gold S1: 3u" Gold/Tin  
 G2: 5u" Gold S2: 5u" Gold/Tin  
 G3: 10u" Gold S3: 10u" Gold/Tin  
 G4: 15u" Gold S4: 15u" Gold/Tin  
 G5: 30u" Gold S5: 30u" Gold/Tin  
 G6: 20u" Gold S6: 20u" Gold/Tin  
 SN: Tin

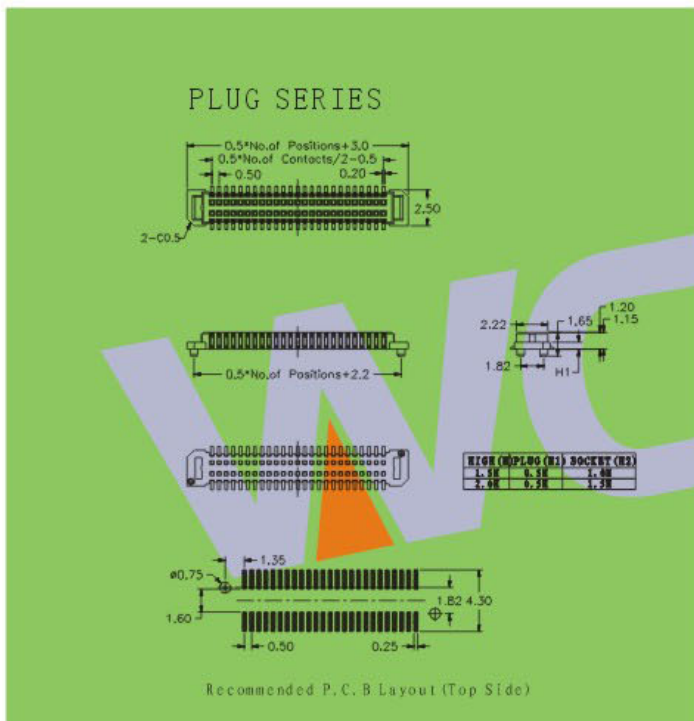

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920  
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418