
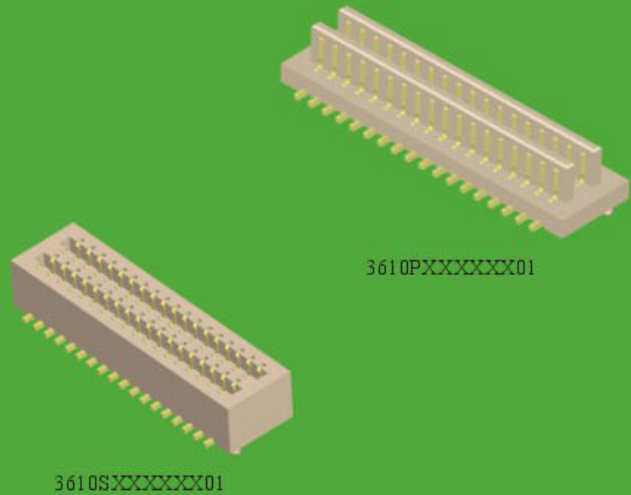


# 0.80mm Board To Board

## SPECIFICATIONS

Current Rating: 0.5AMP  
 Contact Resistance: 40mΩ Max.  
 Insulation Resistance: 100MΩ Min.  
 Withstanding Voltage :50V AC/Minute  
 Operation Temperature: -20°C to +105°C  
 Contact Material: Phosphor Bronze  
 Contact plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: LCP+30%GF

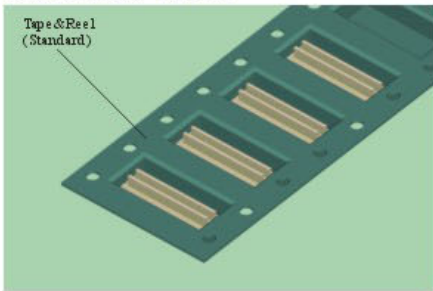



## 3610- X XX XX XX 01

**TYPE**  
 P: PLUG  
 S: SOCKET

**INSULATOR HEIGHT**  
 PLUG=H1  
 SOCKET=H2

**NO. OF PINS PER ROW**  
 25: 25PIN  
 30: 30PIN  
 40: 40PIN  
 50: 50PIN

**CONTACT PLATING**  
 G0: 1u" Gold    S0: 1u" Gold/Tin  
 G1: 3u" Gold    S1: 3u" Gold/Tin  
 G2: 5u" Gold    S2: 5u" Gold/Tin  
 G3: 10u" Gold   S3: 10u" Gold/Tin  
 G4: 15u" Gold   S4: 15u" Gold/Tin  
 G5: 30u" Gold   S5: 30u" Gold/Tin  
 G6: 20u" Gold   S6: 20u" Gold/Tin  
 SN: Tin

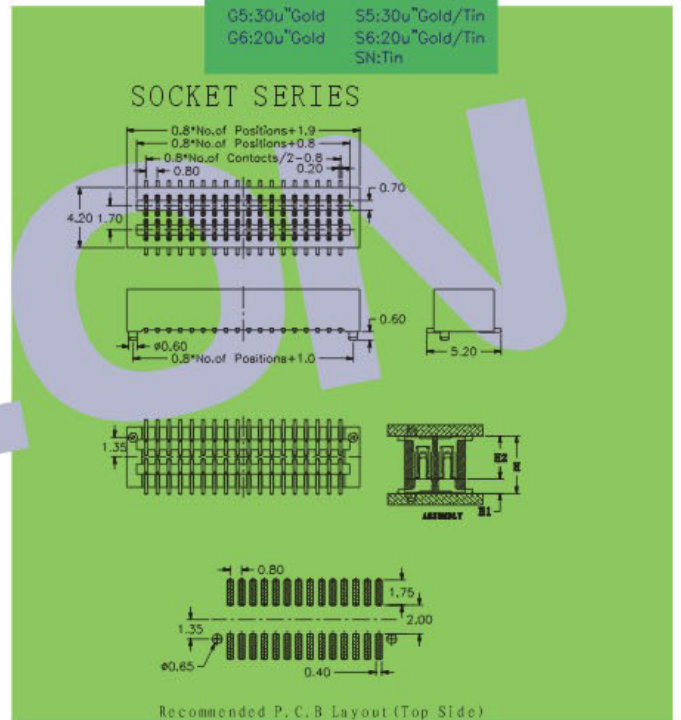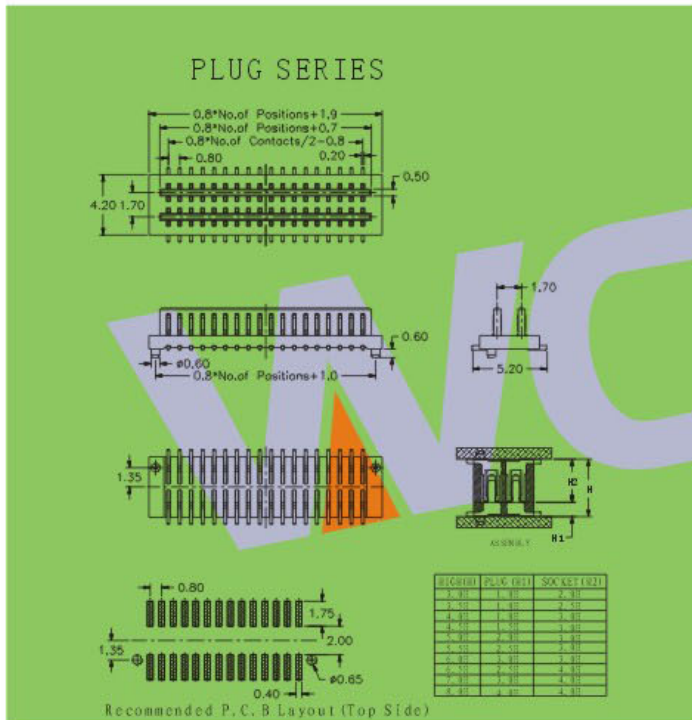

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com    E-mail:sales@wafe-china.com

WAFE DONGGUAN    FAX:+86 769 85358915    TEL:+86 769 85358920  
 WAFE KUNSHAN    FAX:+86 512 57468468    TEL:+86 512 57468418