WCON®
HTTP:WWW.WAFE-CHINA.COM

CONTACT CLIP

SLEEVE

1.27mm Machined Female Header

SPECIFICATIONS

Insulator: Black glass filled polyester PPS+30%GF
Fiammability: UL94V-0
Sleeve: Brass CuZn 36pb3(36000)
Contact clip(3 finger): Beryllium copper (C17200)
Mating pinø: 0.38 to 0.50mm
Forces: (polished steel gauge ø0.41mm)
-Insertion: 0.5N typ. -Winthdrawal: 0.2N typ.
Mechanical life : min 500 cycles
Rated cument: 1.0A
Contact resistance: max 10mΩ
Dielectric strength : min 500VRMS

FILE NO.E248993

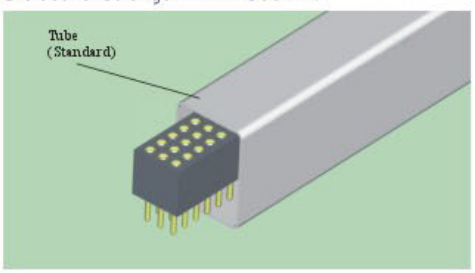


3524-381XXSXX064X1


3524-382XXSXX064X1


3525-382XXSXX064X1


3524-383XXSXX064X1

3524-38 X XX S XX 064 X 1

NO.OF ROW	NO.OF PINS PER ROW	CONTACT PLATING	LENGTH OF TERMINAL	PACKING
1: Single Row 2: Double Row 3: Triple Row		S0:1u" Gold/Tin S4:15u"Gold/Tin S1:3u" Gold/Tin S5:30u"Gold/Tin S2:5u" Gold/Tin S6:20u"Gold/Tin S3:10u"Gold/Tin SN:Tin	064:6.40mm	A:Tray T:Tube R:Tape & Reel 0: PE Bag

	3524-381XXSXX064X1	Straight socket connector:solder tail single row Availability from:2 to 50 contacts Standard number of contacts 25 and 50
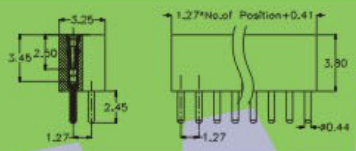	3524-382XXSXX064X1	Straight socket connector:solder tail double row Availability from:4 to 100 contacts Standard number of contacts 50 and 100
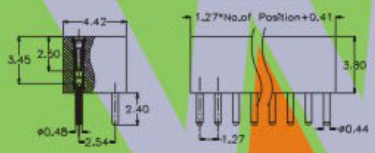	3525-382XXSXX064X1	Straight socket connector:solder tail double row with 2.54mm row to row distance Availability from:4 to 100 contacts Standard number of contacts100
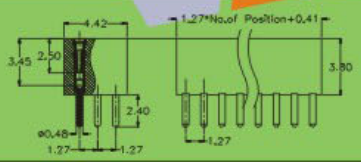	3524-383XXSXX064X1	Straight socket connector:solder tail triple row Availability from:6 to 150 contacts Standard number of contacts 150

※ ※INNOVATION AND DEVELOPMENT ※ ※CONTINUAL IMPROVEMENT ※ ※QUALITY FOREMOST ※ ※CUSTOMER SATISFACTION ※ ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com
WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418