



CONTACT CLIP





SLEEVE


# 1. 27mm Machined Female Header

## SPECIFICATIONS


Insulator: Black glass filled polyester PPS+30%GF  
 Flammability: UL94V-0  
 Sleeve: Brass CuZn 36pb3(36000)  
 Contact clip(3 finger): Beryllium copper (C17200)  
 Mating pin: 0.38 to 0.50mm  
 Forces: (polished steel gauge 0.41mm)  
 -Insertion: 0.5N typ. -Withdrawal: 0.2N typ.  
 Mechanical life :min 500 cycles  
 Rated resistance: 1.0A  
 Contact resistance: max 10mΩ  
 Dielectric strength :min 500V RMX  
 Coplanarity SMD terminations: max 0.1mm  
 (measured on 25mm long connectors)

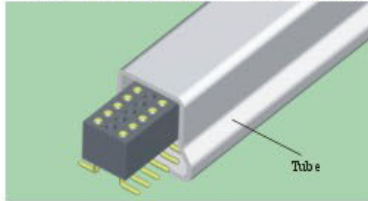


3524-381XXMXX064X1

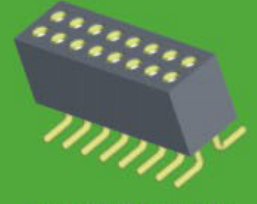

3524-382XXMXX064X1



3525-382XXMXX064X1

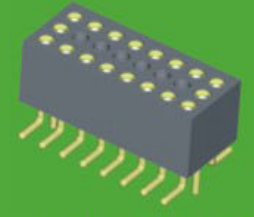

3524-383XXMXX064X1

**3524-38 X XX M XX 064 X 1**



NO.OF ROW  
 1: Single Row  
 2: Double Row

NO.OF PINS  
 PER ROW

CONTACT PLATING  
 S0:1u" Gold/Tin S4:15u"Gold/Tin  
 S1:3u" Gold/Tin S5:30u"Gold/Tin  
 S2:5u" Gold/Tin S6:20u"Gold/Tin  
 S3:10u"Gold/Tin S1: Tin


LENGTH OF TERMINAL  
 064:6.40mm

PACKING  
 A:Tray T:Tube  
 R:Tape & Reel  
 O: PE Bag





3524-381XXMXX064X1

SMD socket connector: single row perpendicular mount  
 Availability from: 3 to 50 contacts  
 Standard number of contacts 25 and 50





3524-382XXMXX064X1

SMD socket connector: double row perpendicular mount  
 Availability from: 4 to 100 contacts  
 Standard number of contacts 50 and 100



3525-382XXMXX064X1

SMD socket connector: double row with 2.54mm row to row distance perpendicular mount  
 Availability from: 4 to 100 contacts  
 Standard number of contacts 100



3524-383XXMXX064X1

SMD socket connector: double row with 2.54mm row to row distance perpendicular mount with 2  
 Availability from: 4 to 100 contacts  
 Standard number of contacts 100

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920  
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418