





CONTACTS


# 1. 27mm Machined Pin Header

## SPECIFICATIONS


Insulator: Black glass filled polyester PPS+30%GF  
 Flammability: UL94V-0  
 Contact: Brass CuZn 36pb3(36000)  
 Connecting pin $\phi$ : 0.41mm  
 Mechanical life :min 500 cycles  
 Rated resistance:1.0A  
 Contact resistance: max 10m $\Omega$   
 Dielectric strength :min 1000V RMX

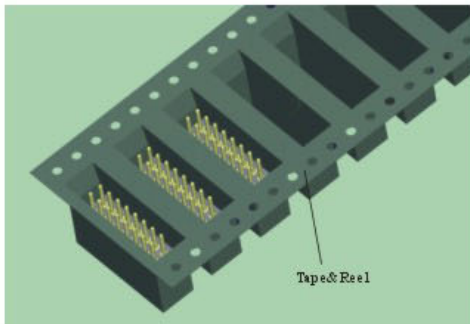


3514-191XXSXX081X1



3514-192XXSXX081X1



3515-192XXSXX081X1



3514-193XXSXX081X1


**3514-19 X XX S XX 081 X 1**

NO.OF ROW  
 1: Single Row  
 2: Double Row  
 3: Triple Row

NO.OF PINS  
 PER ROW


CONTACT PLATING  
 S0:1u" Gold/Tin S4:15u"Gold/Tin  
 S1:3u" Gold/Tin S5:30u"Gold/Tin  
 S2:5u" Gold/Tin S6:20u"Gold/Tin  
 S3:10u"Gold/Tin SN:Tin

PACKING  
 A:Tray T:Tube  
 R:Tape & Reel  
 Q: PE Bag

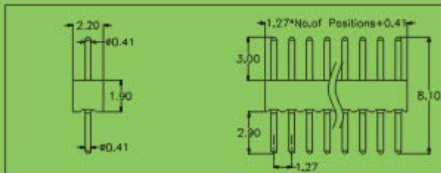


3514-191XXSXX081X1

Straight pin connector:solder tail single row  
 Availability from:2 to 50 contacts  
 Standard number of contacts 25 and 50

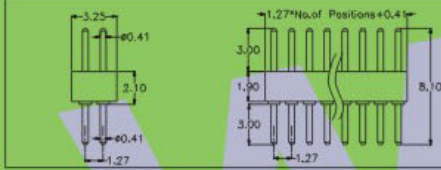


3514-192XXSXX081X1

Straight pin connector:solder tail double row  
 Availability from:4 to 100 contacts  
 Standard number of contacts 50 and 100

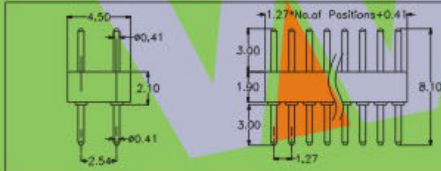

3515-192XXSXX081X1

Straight pin connector:solder tail double row with 2.54mm row to row distance  
 Availability from:4 to 100 contacts  
 Standard number of contacts 100

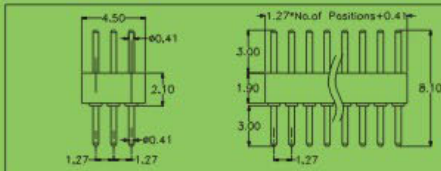

3514-193XXSXX081X1

Straight pin connector:solder tail triple row  
 Availability from:6 to 150 contacts  
 Standard number of contacts 150

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920  
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418