





1. 27mm Machined Pin Header

SPECIFICATIONS



Insulator: Black glass filled polyester PPS+30%GF
 Flammability: UL94V-0
 Contact: Brass CuZn 36pb3(36000)
 Connecting pin ϕ : 0.41mm
 Mechanical life :min 500 cycles
 Rated resistance:1.0A
 Contact resistance: max 10m Ω
 Dielectric strength :min 1000V RMX

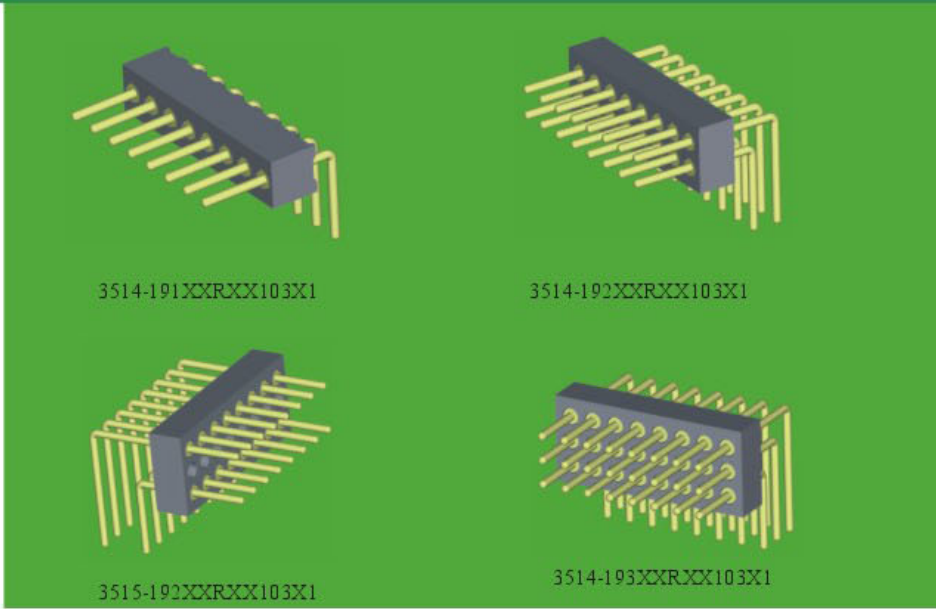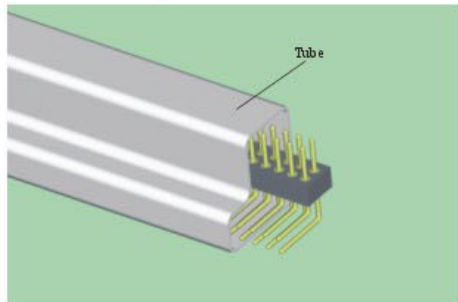

3514-19	X	XX	R	XX	103	X	1		
NO.OF ROW 1: Single Row 2: Double Row 3: Triple Row		NO.OF PINS PER ROW		CONTACT PLATING S0:1u" Gold/Tin S4:15u"Gold/Tin S1:3u" Gold/Tin S5:30u"Gold/Tin S2:5u" Gold/Tin S6:20u"Gold/Tin S3:10u"Gold/Tin SN:Tin		LENGTH OF TERMINAL 103:10,35mm		PACKING A:Tray T:Tube R:Tape & Reel O: PE Bag	

	3514-191XXRXX103X1	Right angle pin connector:solder tail, single row Availability from:2 to 50 contacts Standard number of contacts 25 and 50
	3514-192XXRXX103X1	Right angle pin connector:solder tail, double row Availability from:4 to 100 contacts Standard number of contacts 50 and 100
	3515-192XXRXX103X1	Right angle pin connector:solder tail, double row with 2.54mm row to row distance Availability from:4 to 100 contacts Standard number of contacts 100
	3514-193XXRXX103X1	Right angle pin connector:solder tail triple row Availability from:6 to 150 contacts Standard number of contacts 150

※INNOVATION AND DEVELOPMENT※※CONTINUAL IMPROVEMENT※※QUALITY FOREMOST※※CUSTOMER SATISFACTION※※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418