




CONTACT


1. 27mm Machined Pin Header

SPECIFICATIONS



Insulator: Black glass filled polyester PPS+30%GF
 Flammability: UL94V-0
 Contact: Brass CuZn 36pb3(36000)
 Connecting pin ϕ : 0.41mm
 Mechanical life :min 500 cycles
 Rated resistance:1.0A
 Contact resistance: max 10m Ω
 Dielectric strength :min 1000V RMX
 Coplanarity SMD terminations: max 0.1mm
 (measured on 25 mm long connectors)



3514-191XXMXX081X1




3514-192XXMXX081X1

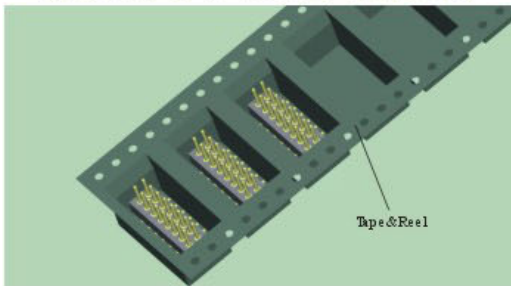

3515-192XXMXX081X1


3514-19 X XX M XX 081 X 1

NO.OF ROW 1: Single Row 2: Double Row 3: Triple Row	NO.OF PINS PER ROW	CONTACT PLATING S0:1u" Gold/Tin S4:15u"Gold/Tin S1:3u" Gold/Tin S5:30u"Gold/Tin S2:5u" Gold/Tin S6:20u"Gold/Tin S3:10u"Gold/Tin SN:Tin	LENGTH OF TERMINAL 081:8.10mm	PACKING A:Tray T:Tube R:Tape & Reel 0: PE Bag
---	---------------------------	---	---	---

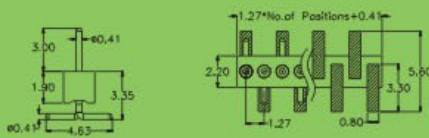


3514-191XXMXX081X1

SMD pin connector: single row perpendicular mount
 Availability from: 3 to 50 contacts
 Standard number of contacts 25 and 50

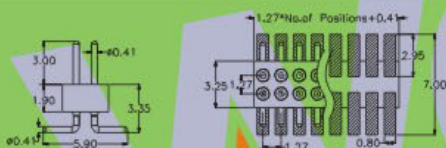

3514-192XXMXX081X1

SMD pin connector: double row perpendicular mount
 Availability from: 4 to 100 contacts
 Standard number of contacts 50 and 100

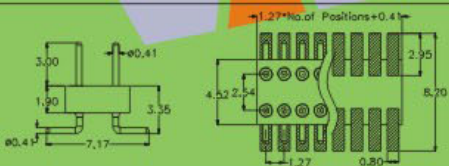

3515-192XXMXX081X1

SMD pin connector: double row with 2.54mm row to row distance perpendicular mount
 Availability from: 4 to 100 contacts
 Standard number of contacts 100

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418