





CONTACT

1.778mm Machined Pin Header

SPECIFICATIONS

Insulator: Black glass filled polyester PPS+30%GF
 Flammability: UL94V-0
 Contact: Brass CuZn 36pb3(36000)
 Connecting pin ϕ : 0.45mm
 Mechanical life :min 500 cycles
 Rated resistance:1.0A
 Contact resistance: max 10m Ω
 Dielectric strength :min 1000VRMX

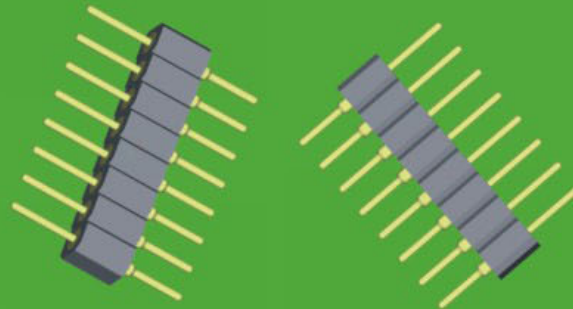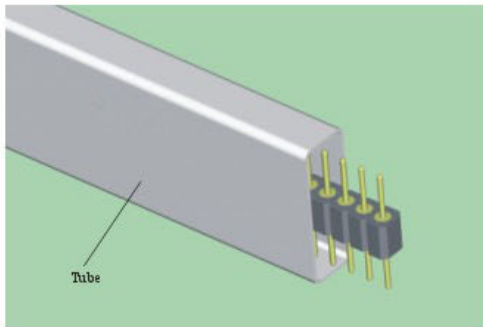


3513-281XXSXX120X1

3513-28 1 XX S XX 120 X 1

NO. OF PINS
PER ROW

CONTACT PLATING
 S0:1u" Gold/Tin S4:15u"Gold/Tin
 S1:3u" Gold/Tin S5:30u"Gold/Tin
 S2:5u" Gold/Tin S6:20u"Gold/Tin
 S3:10u"Gold/Tin SN:Tin

PACKING
 A:Tray T:Tube
 R:Tape & Reel
 0: PE Bag

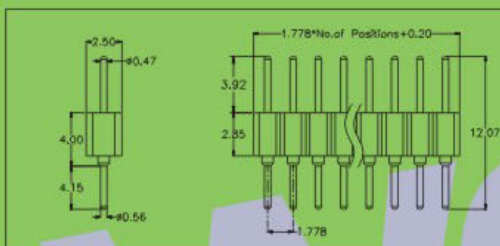

Straight pin connector: single row, grid spacing 1.778mm
 Availability from:2 to 38 contacts
 Standard number of contacts 21 and 38

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418