






2. 00mm Machined Female Header

SPECIFICATIONS


Insulator: Black glass filled polyester PPS+30%GF
 Flammability: UL94V-0
 Sleeve: Brass CuZn 36pb3(36000)
 Contact clip(6 finger): Beryllium copper (C17200)
 Mating pin: 0.40 to 0.66mm or 0.50mm
 Forces: (polished steel gauge 0.46mm)
 -Insertion: 0.7N typ. -Withdrawal: 0.4N typ.
 Mechanical life :min 500 cycles
 Rated current: 3.0A
 Contact resistance: max 10mΩ
 Dielectric strength :min 1000V_{RMX}

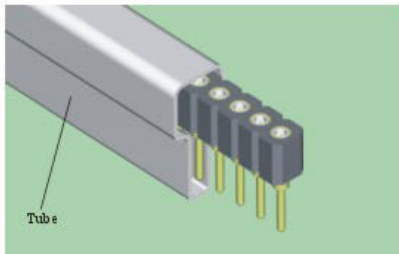


3522-281XXSXX059X1



3522-282XXSXX059X1



3522-281XXSXX074X1



3522-282XXSXX074X1

3522-28 X XX S XX XXX X 1

NO. OF ROW
 1: Single Row
 2: Double Row

NO. OF PINS
 PER ROW

CONTACT PLATING
 S0:1u" Gold/Tin S4:15u"Gold/Tin
 S1:3u" Gold/Tin S5:30u"Gold/Tin
 S2:5u" Gold/Tin S6:20u"Gold/Tin
 S3:10u"Gold/Tin S8: Tin

LENGTH OF TERMINAL

PACKING
 A:Tray T:Tube
 R:Tape & Reel
 O: PE Bag

| | | |
|--|---------------------------|---|
| | <p>3522-281XXSXX059X1</p> | <p>Straight socket connector low profil height 2.8mm:solder tail single row Availability from:2 to 40 contacts Standard number of contacts 40</p> |
| | <p>3522-282XXSXX059X1</p> | <p>Straight socket connector low profil height 2.8mm:solder tail double row Availability from:4 to 80 contacts Standard number of contacts 80</p> |
| | <p>3522-281XXSXX074X1</p> | <p>Straight socket connector height 4.2mm:solder tail single row Availability from:2 to 40 contacts Standard number of contacts 40</p> |
| | <p>3522-282XXSXX074X1</p> | <p>Straight socket connector height 4.2mm:solder tail double row Availability from:4 to 80 contacts Standard number of contacts 80</p> |

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418