



CONTACT CLIP




SLEEVE


2. 00mm Machined Female Header

SPECIFICATIONS

Insulator: Black glass filled polyester PPS+30%GF
 Flammability: UL94V-0
 Sleeve: Brass CuZn 36pb3(36000)
 Contact clip(6 finger): Beryllium copper (C17200)
 Mating pin: 0.40 to 0.66mm or 0.5mm
 Forces: (polished steel gauge \varnothing 0.46mm)
 -Insertion: 0.7N typ. -Withdrawal: 0.4N typ.
 Mechanical life :min 500 cycles
 Rated current: 3.0A
 Contact resistance: max 10m Ω
 Dielectric strength :min 1000VRMX

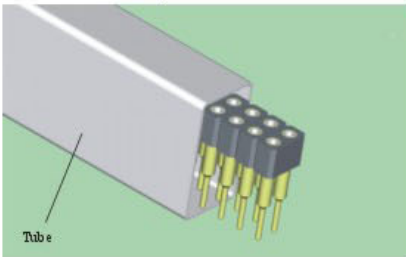

3522-281XXSXX094X1



3522-282XXSXX094X1




3522-281XXSXX112X1



3522-281XXSXX147X1



3522-282XXSXX147X1



3522-282XXSXX112X1

3522-28 X XX S XX XXX X 1


NO. OF ROW
 1: Single Row
 2: Double Row

NO. OF PINS PER ROW

CONTACT PLATING:
 S0:1 μ Gold/Tin S4:15 μ Gold/Tin
 S1:3 μ Gold/Tin S5:30 μ Gold/Tin
 S2:5 μ Gold/Tin S6:20 μ Gold/Tin
 S3:10 μ Gold/Tin S9: Tin


LENGTH OF TERMINAL
 094:9.40mm
 112:11.20mm
 147:14.70mm

PACKING
 A: Tray T: Tube
 R: Tape & Reel
 0: PE Bag

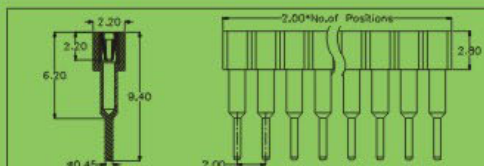


3522-281XXSXX094X1

Straight socket connector height
 6.2mm: solder tail, single row
 Availability from: 2 to 40 contacts
 Standard number of contacts 40

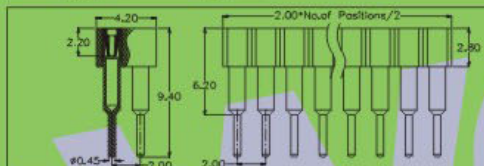

3522-282XXSXX094X1


Straight socket connector height
 6.2mm: solder tail single row
 Availability from: 1 to 40 contacts
 Standard number of contacts 40

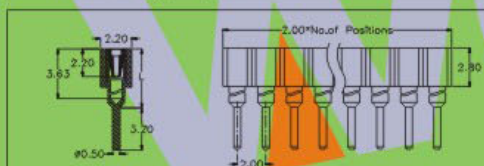

3522-281XXSXXXXXX1

DIM "L"
8.00mm
11.50mm

Straight socket connector length
 3.2mm: solder tail single row
 Availability from: 1 to 40 contacts
 Standard number of contacts 40

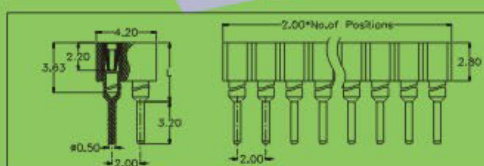

3522-282XXSXXXXXX1

DIM "L"
8.00mm
11.50mm

Straight socket connector length
 3.2mm: solder tail double row
 Availability from: 2 to 80 contacts
 Standard number of contacts 80

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418