



CONTACT CLIP




2. 00mm Machined Female Header

SPECIFICATIONS


Insulator: Black glass filled polyester PPS+30%GF
 Flammability: UL94V-0
 Sleeve: Brass CuZn 36pb3(36000)
 Contact clip(6 finger): Beryllium copper (C17200)
 Mating pin ϕ : 0.40 to 0.66mm or 0.50SQ
 Forces: (polished steel gauge ϕ 0.46mm)
 -Insertion: 0.7N typ. -Withdrawal: 0.4N typ.
 Mechanical life: min 500 cycles
 Rated current: 3.0A
 Contact resistance: max 10m Ω
 Dielectric strength: min 1000VRMX

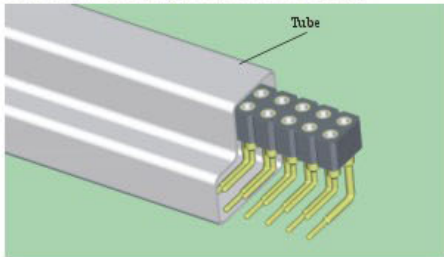

3522-281XXRX096X1



SHORT SLEEVE



3522-382XXRX096X1



LONG SLEEVE


3522-28 X XX R XX 096 X 1

NO. OF ROW
 1: Single Row
 2: Double Row


NO. OF PINS
 PER ROW

CONTACT PLATING
 S0:1 μ " Gold/Tin S4:15 μ "Gold/Tin
 S1:3 μ " Gold/Tin S5:30 μ "Gold/Tin
 S2:5 μ " Gold/Tin S6:20 μ "Gold/Tin
 S3:10 μ "Gold/Tin SN:Tin

PACKING
 A:Tray T:Tube
 R:Tape & Reel
 O: PE Bag

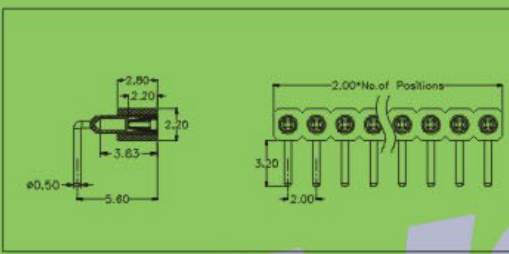

3522-281XXRX096X1
 Right angle socket connector solder tail, single row
 Availability from: 2 to 40 contacts
 Standard number of contacts 40

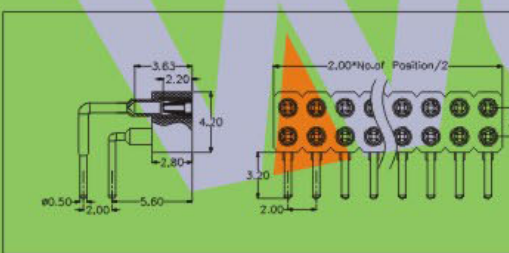

3522-282XXRX096X1
 Right angle socket connector solder tail double row
 Availability from: 4 to 80 contacts
 Standard number of contacts 80

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418