





CONTACT

2.00mm Machined Pin Header


SPECIFICATIONS

Insulator: Black glass filled polyester PPS+30%GF
 Flammability: UL94V-0
 Contact: Brass CuZn 36pb3(36000)
 Connecting pin ϕ : 0.47mm
 Mechanical life :min 500 cycles
 Rated resistance:3.0A
 Contact resistance: max 10m Ω
 Dielectric strength :min 1000V RMX

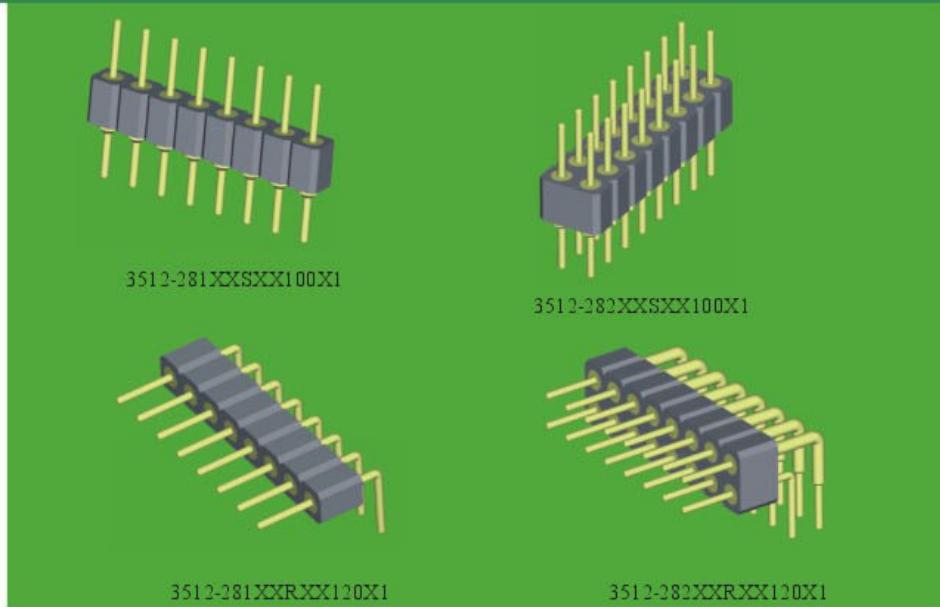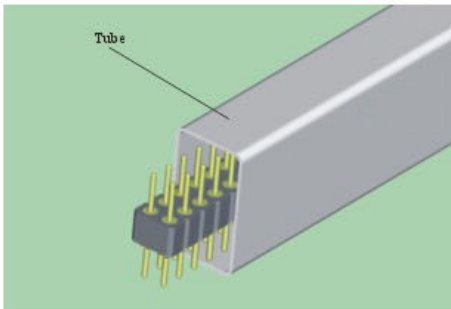


3512-28 X XX X XX XXX X 1

<p>NO.OF ROW 1: Single Row 2: Double Row</p>	<p>NO.OF PINS PER ROW</p>	<p>CONTACT SHAPE S: Straight R: Right Angle</p>	<p>CONTACT PLATING S0:1μ" Gold/Tin S4:15μ"Gold/Tin S1:3μ" Gold/Tin S5:30μ"Gold/Tin S2:5μ" Gold/Tin S6:20μ"Gold/Tin S3:10μ"Gold/Tin S7: Tin</p>	<p>LENGTH OF TERMINAL 100:10.00mm 120:12.00mm</p>	<p>PACKING A:Tray T:Tube R:Tape & Reel O: PE Bag</p>
---	----------------------------------	--	--	--	--

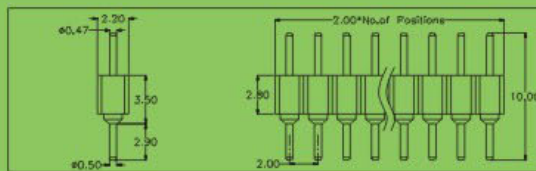


3512-281XXSXX100X1

Straight pin connector:solder tail single row
 Availability from:2 to 40 contacts
 Standard number of contacts 40

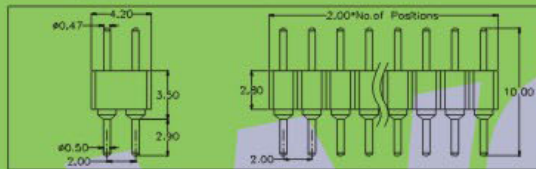


3512-282XXSXX100X1

Straight pin connector:solder tail double row
 Availability from:4 to 80 contacts
 Standard number of contacts 40

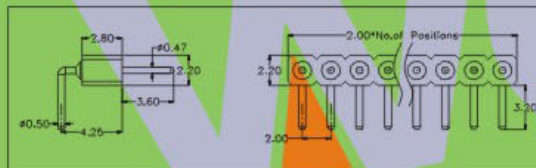

3512-281XXRXX120X1

Right angle pin connector:solder tail single row
 Availability from:2 to 40 contacts
 Standard number of contacts 40

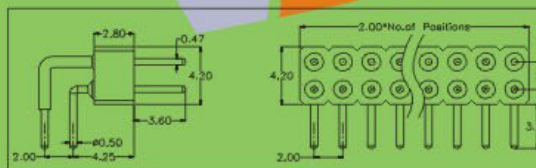

3512-282XXRXX120X1

Right angle pin connector:solder tail double row
 Availability from:4 to 80 contacts
 Standard number of contacts 80

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418