



CONTACT CLIP





SLEEVE


2. 54mm Machined Female Header

SPECIFICATIONS


Insulator: Black glass filled polyester PPS+30%GF
 Flammability: UL94V-0
 Sleeve: Brass CuZn 36pb3(36000)
 Contact clip(6 finger): Beryllium copper (C17200)
 Mating pin ϕ : 0.47mm
 Forces: (polished steel gauge ϕ 0.43mm)
 -Insertion: 3N typ. -Withdrawal: 1.5N typ.
 Mechanical life: min 500 cycles
 Rated current: 3.0A
 Contact resistance: max 10m Ω
 Dielectric strength: min 1000VRMX

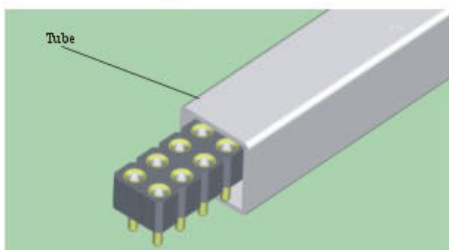


3520-191XXSXX048X1



3520-192XXSXX048X1



3520-301XXSXX054X1



3520-302XXSXX054X1

3520-XX X XX S XX XXX X 1

HEIGHT OF HOUSING
 19:1.90mm
 30:3.00mm


NO. OF ROW
 1: Single Row
 2: Double Row

NO. OF PINS
 PER ROW

CONTACT PLATING
 S0:1 μ Gold/Tin
 S1:3 μ Gold/Tin
 S2:5 μ Gold/Tin
 S3:10 μ Gold/Tin
 S4:15 μ Gold/Tin
 S5:30 μ Gold/Tin
 S6:20 μ Gold/Tin
 S1: Tin


LENGTH OF TERMINAL
 048:4.82mm
 054:5.40mm

PACKING:
 A: Tray T: Tube
 R: Tape & Reel
 0: PE Bag

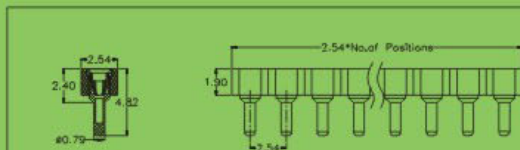


3520-191XXSXX048X1

Straight socket connector ultralow
 profil height 2.4mm:solder
 tail, single row
 Availability from:2 to 40 contacts
 Standard number of contacts 20, 32, 40

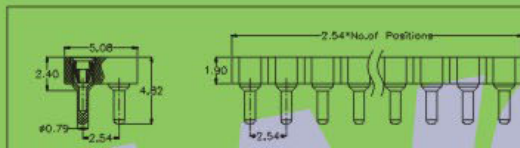


3520-192XXSXX048X1

Straight socket connector ultralow
 profil height 2.4mm:solder
 tail, double row
 Availability from:4 to 80 contacts
 Standard number of contacts 20, 56, 72

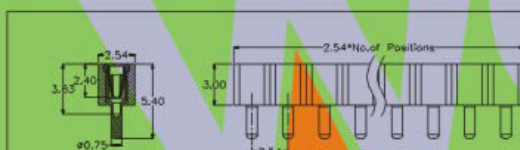

3520-301XXSXX054X1

Straight socket connector height
 3.0mm:solder tail, single row
 Availability from:1 to 40 contacts
 Standard number of contacts
 5, 6, 8, 9, 10, 11, 12, 14, 16, 17, 20, 25, 30, 32, 40

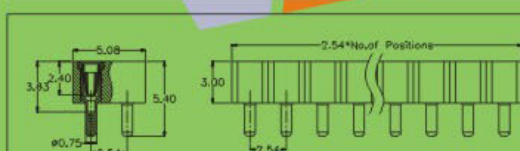

3520-302XXSXX054X1

Straight socket connector height
 3.0mm:solder tail double row
 Availability from:2 to 80 contacts
 Standard number of contacts
 20, 56, 60, 72

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418