


CONTACT


## 2.54mm Machined Pin Header

### SPECIFICATIONS


Insulator: Black glass filled polyester PPS+30%GF  
 Flammability: UL94V-0  
 Contact: Brass CuZn 36pb3(36000)  
 Connecting pin $\phi$ : 0.47mm  
 Mechanical life :min 500 cycles  
 Rated resistance: 3.0A  
 Contact resistance: max 10m $\Omega$   
 Dielectric strength :min 1000V<sub>RMS</sub>




3510-191XXSXX076X1




3510-192XXSXX076X1

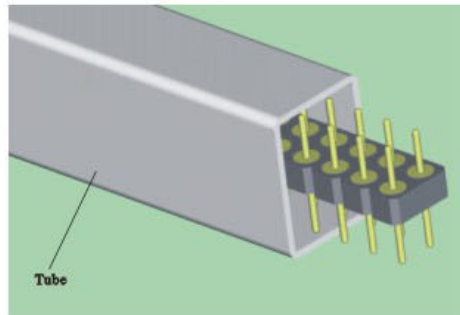

Tube



3510-191XXSXX085X1



3510-192XXSXX085X1

**3510-19 X XX S XX XXX X 1**

NO.OF ROW  
 1: Single Row  
 2: Double Row

NO.OF PINS  
 PER ROW

CONTACT PLATING  
 S0:1 $\mu$  Gold/Tin S4:15 $\mu$  Gold/Tin  
 S1:3 $\mu$  Gold/Tin S5:30 $\mu$  Gold/Tin  
 S2:5 $\mu$  Gold/Tin S6:20 $\mu$  Gold/Tin  
 S3:10 $\mu$  Gold/Tin SN:Tin

LENGTH OF TERMINAL  
 076:7.64mm  
 085:8.51mm

PACKING  
 A:Tray T:Tube  
 R:Tape & Reel  
 0: PE Bag

	<p><b>3510-191XXSXX076X1</b></p> <p>Straight pin connector ultralow                      profil height 1.9mm:solder tail                      single row                      Availability from:2 to 40 contacts                      Standard number of contacts 20, 32, 40</p>
	<p><b>3510-192XXSXX076X1</b></p> <p>Straight pin connector ultralow                      profil height 1.9mm:solder tail                      double row                      Availability from:4 to 80 contacts                      Standard number of contacts 20, 56, 72</p>
	<p><b>3510-191XXSXX085X1</b></p> <p>Straight pin connector ultralow                      profil height 2.16mm:solder tail                      single row                      Availability from:2 to 40 contacts                      Standard number of contacts 20, 32, 40</p>
	<p><b>3510-192XXSXX085X1</b></p> <p>Straight pin connector ultralow                      profil height 2.16mm:solder tail                      double row                      Availability from:4 to 80 contacts                      Standard number of contacts 20, 56, 72</p>

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920  
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418