

CONTACT



## 2.54mm Machined Pin Header

### SPECIFICATIONS


Insulator: Black glass filled polyester PPS+30%GF  
 Flammability: UL94V-0  
 Contact: Brass CuZn 36pb3(36000)  
 Connecting pin $\varnothing$ : 0.60/0.64mm  
 Mechanical life :min 500 cycles  
 Rated resistance: 3.0A  
 Contact resistance: max 10m $\Omega$   
 Dielectric strength :min 1000VRMX




FILE NO.E248993

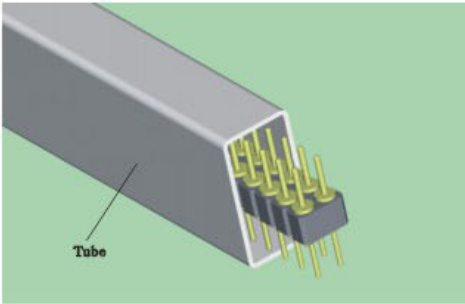


3510-301XXSXX119X1



3510-302XXSXX119X1



3510-301XXSXX122X1



3510-302XXSXX122X1

**3510-30 X XX S XX XXX X 1**


NO.OF ROW  
 1: Single Row  
 2: Double Row

NO.OF PINS  
 PER ROW

CONTACT PLATING  
 S0:1 $\mu$ m Gold/Tin S4:15 $\mu$ m Gold/Tin  
 S1:3 $\mu$ m Gold/Tin S5:30 $\mu$ m Gold/Tin  
 S2:5 $\mu$ m Gold/Tin S6:20 $\mu$ m Gold/Tin  
 S3:10 $\mu$ m Gold/Tin S8:Sn


LENGTH OF TERMINAL  
 119:11.96mm  
 122:12.20mm

PACKING  
 A:Tray T:Tube  
 R:Tape & Reel  
 0: PE Bag

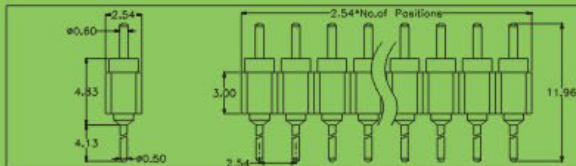


3510-301XXSXX119X1

Straight pin connector ultralow profil height 3.0mm:solder tail single row  
 Availability from:1 to 40 contacts  
 Standard number of contacts 5, 6, 8, 9, 10, 11, 12, 14, 16, 17, 20, 25, 30, 32, 40

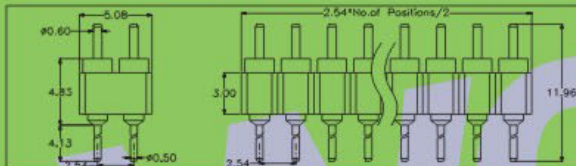


3510-302XXSXX119X1

Straight pin connector ultralow profil height 3.0mm:solder tail double row  
 Availability from:2 to 80 contacts  
 Standard number of contacts 20, 56, 60, 72

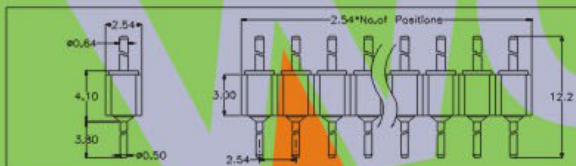

3510-301XXSXX122X1

Straight pin connector height 4.1mm:solder tail single row  
 Availability from:1 to 40 contacts  
 Standard number of contacts 5, 6, 8, 9, 10, 11, 12, 14, 16, 17, 20, 25, 30, 32, 40

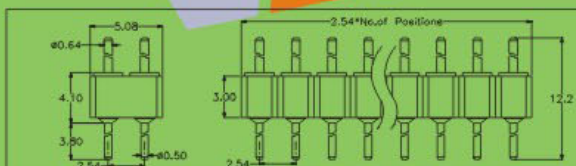

3510-302XXSXX122X1

Straight pin connector height 4.1mm:solder tail double row  
 Availability from:2 to 80 contacts  
 Standard number of contacts 20, 56, 60, 72

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920  
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418