WCON®
HTTP:WWW.WAFE-CHINA.COM



2.00*2.00mm DIP Plug

SPECIFICATIONS

FILE NO.E248993

Current Rating: 1.0AMP
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage : 1000V AC/Minute
Operation Temperature: −40℃ to+105℃
Contact Material: Phosphor Bronze
Contact plating: Au or Sn Over Ni
Insulator Material: Polyester (UL94V−0)
Standard: PBT+30%GF

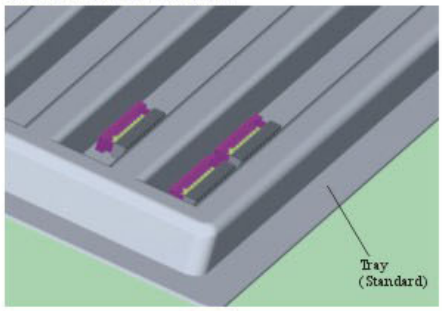

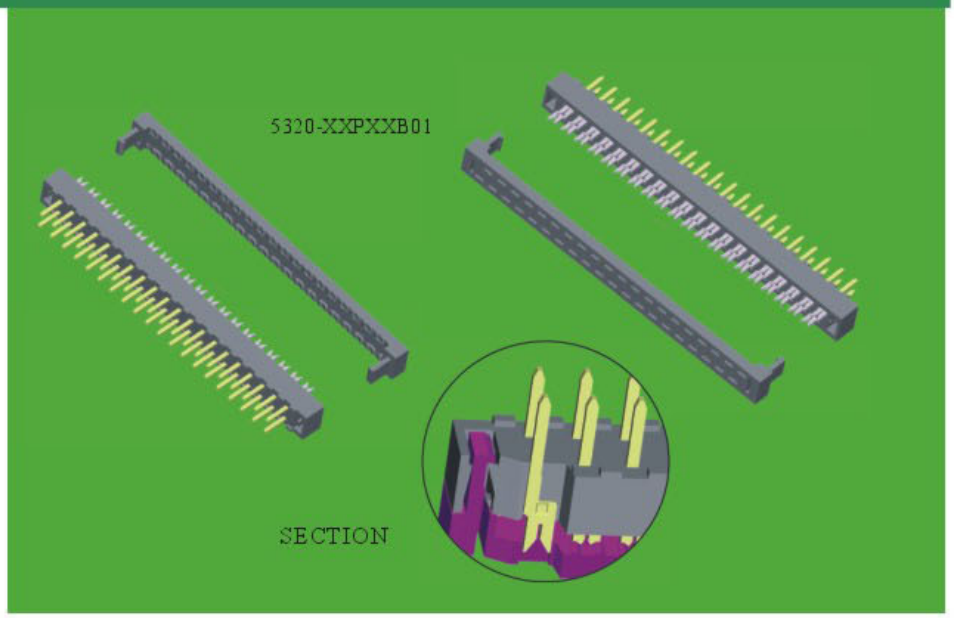

5320- XX X XX B 01

- **XX** — NO.OF PINS 04~80P
- **X** — CONTACT MATERIAL
  B:Bronze
  P:Phosphor Bronze
- **XX** — CONTACT PLATING
  G0:1u" Gold S0:1u" Gold/Tin
  G1:3u" Gold S1:3u" Gold/Tin
  G2:5u" Gold S2:5u" Gold/Tin
  G3:10u"Gold S3:10u"Gold/Tin
  G4:15u"Gold S4:15u"Gold/Tin
  G5:30u"Gold S5:30u"Gold/Tin
  G6:20u"Gold S6:20u"Gold/Tin
  SN:Tin
- **B** — INSULATOR COLOUR
  B:Black G:Grey(427C)
  E:Grey(413C)

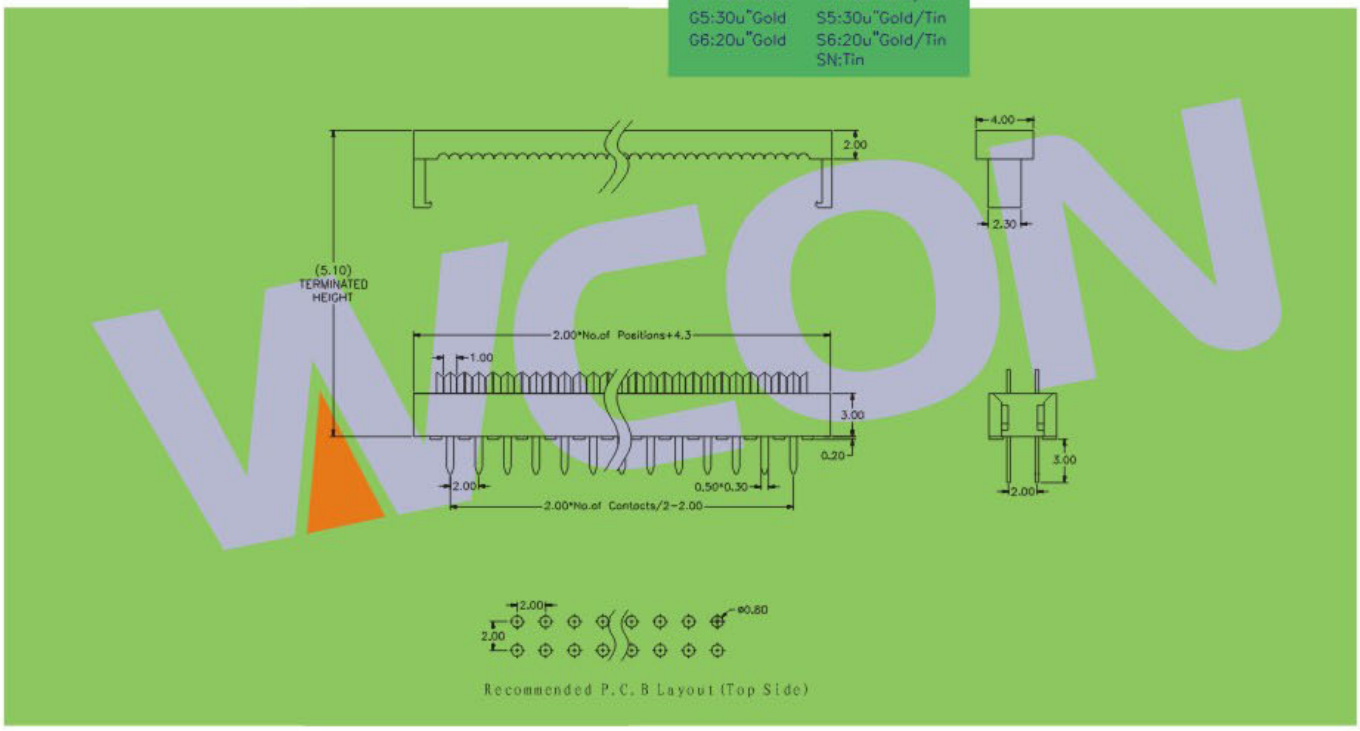

※ ※INNOVATION AND DEVELOPMENT ※ ※CONTINUAL IMPROVEMENT ※ ※QUALITY FOREMOST ※ ※CUSTOMER SATISFACTION ※ ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com
WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418