





## 2.54\*2.54mm DIP Plug

### SPECIFICATIONS



Current Rating: 3.0AMP  
 Contact Resistance: 20m Ω Max.  
 Insulation Resistance: 1000M Ω Min.  
 Withstanding Voltage : 500V AC/Minute  
 Operation Temperature: -40°C to +105°C  
 Contact Material: Brass  
 Contact plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PBT+30%GF

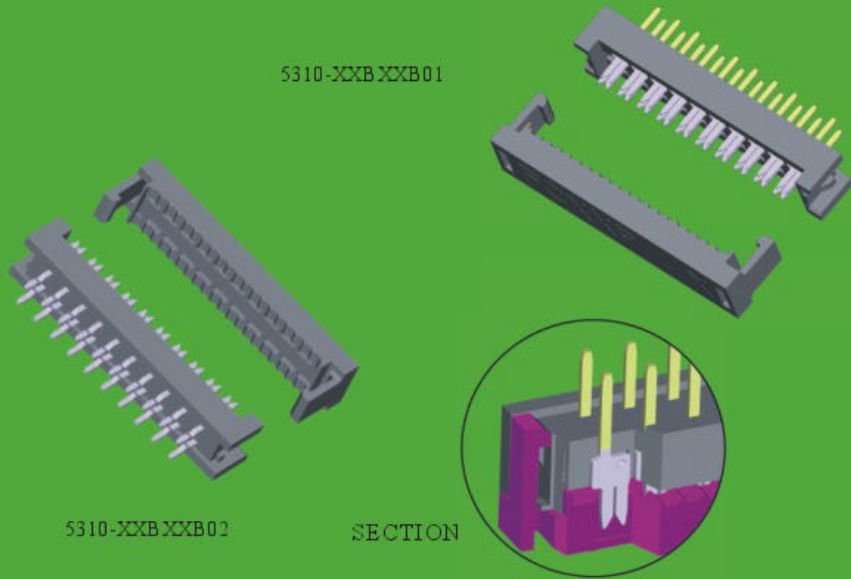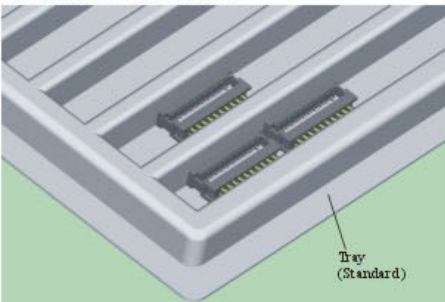


## 5310-XX X XX B XX

NO. OF PINS  
 PER ROW  
 05~34P

CONTACT MATERIAL  
 B: Bronze  
 P: Phosphor Bronze

CONTACT PLATING  
 G0: 1u" Gold S0: 1u" Gold/Tin  
 G1: 3u" Gold S1: 3u" Gold/Tin  
 G2: 5u" Gold S2: 5u" Gold/Tin  
 G3: 10u" Gold S3: 10u" Gold/Tin  
 G4: 15u" Gold S4: 15u" Gold/Tin  
 G5: 30u" Gold S5: 30u" Gold/Tin  
 G6: 20u" Gold S6: 20u" Gold/Tin  
 SN: Tin

INSULATOR COLOUR  
 B: Black G: Grey(427C)  
 E: Grey(413C)

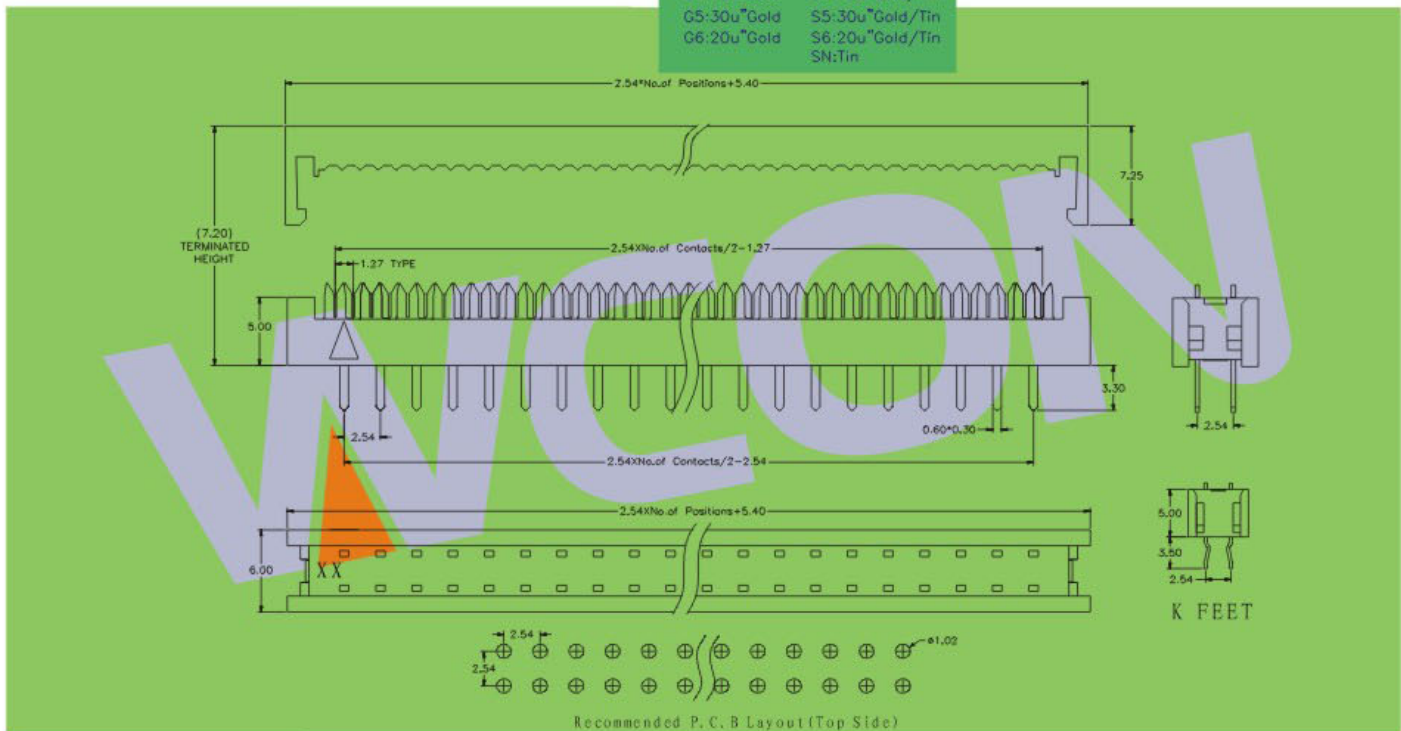

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920  
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418