




Terminated With Pitch
 1.27mm Flat Cable



2. 54mm DIP Plug

SPECIFICATIONS

Current Rating: 3.0AMP
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 3000MΩ Min.
 Withstanding Voltage :500V AC/Minute
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze/Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT+30%GF

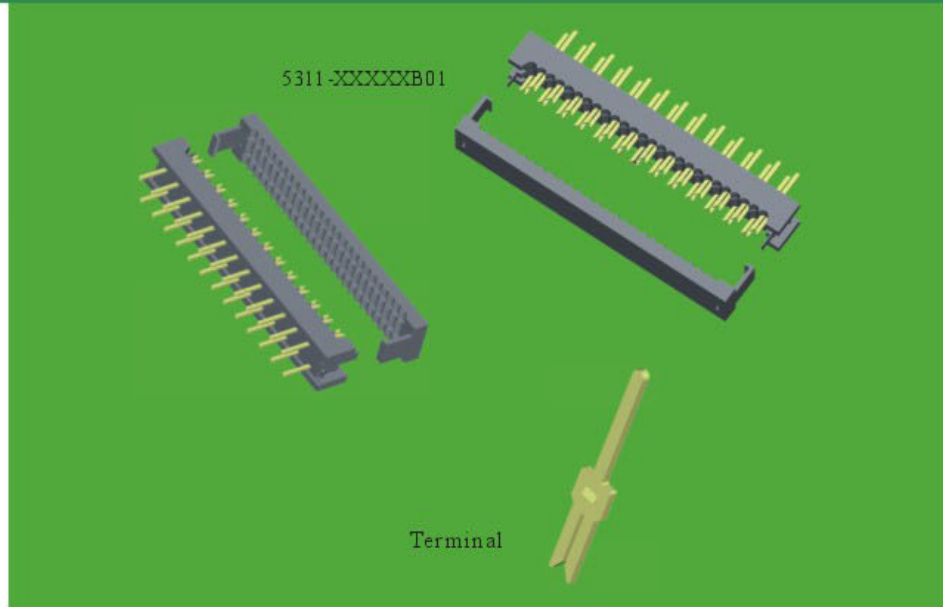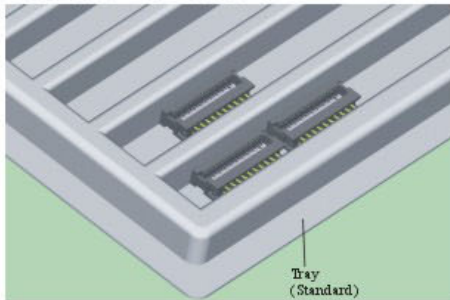

5311-XX

X

XX

B





01

NO. OF PINS
 06~64P

CONTACTS MATERIAL
 P: Phosphor Bronze
 B: Brass

CONTACT PLATING
 G0: 1u" Gold S0: 1u" Gold/Tin
 G1: 3u" Gold S1: 3u" Gold/Tin
 G2: 5u" Gold S2: 5u" Gold/Tin
 G3: 10u" Gold S3: 10u" Gold/Tin
 G4: 15u" Gold S4: 15u" Gold/Tin
 G5: 30u" Gold S5: 30u" Gold/Tin
 G6: 20u" Gold S6: 20u" Gold/Tin
 SN: Tin

INSULATOR COLOUR
 B: Black G: Grey(427C)
 E: Grey(413C)

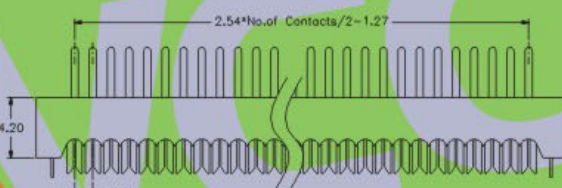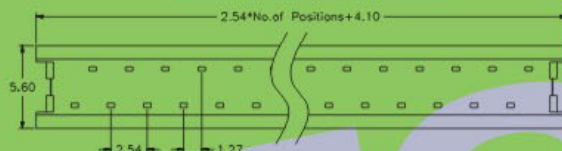

Recommended P. C. B Layout (Top Side)

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418