
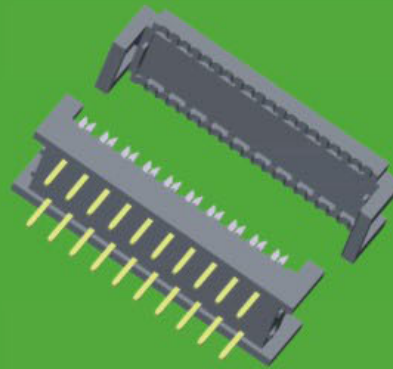


Terminated With Pitch
1.270mm Flat Cable

2.54*7.62mm DIP Plug


SPECIFICATIONS

Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 1000V AC/Minute
 Operation Temperature: -40°C to +105°C
 Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT+30%GF

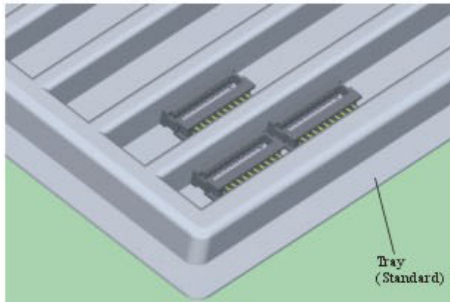

5350-XXBXXBXX

SECTION





5350-XX X XX B XX

NO. OF PINS
04~64P

CONTACT MATERIAL
B: Bronze
P: Phosphor Bronze

CONTACT PLATING
G0: 1u" Gold S0: 1u" Gold/Tin
G1: 3u" Gold S1: 3u" Gold/Tin
G2: 5u" Gold S2: 5u" Gold/Tin
G3: 10u" Gold S3: 10u" Gold/Tin
G4: 15u" Gold S4: 15u" Gold/Tin
G5: 30u" Gold S5: 30u" Gold/Tin
G6: 20u" Gold S6: 20u" Gold/Tin
SN: Tin

INSULATOR COLOUR
B: Black G: Grey(427C)
E: Grey(413C)

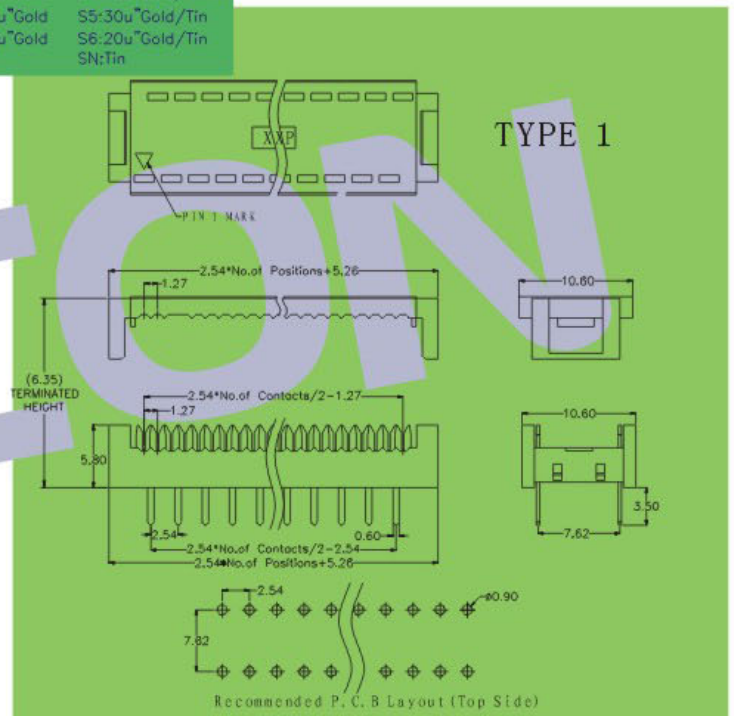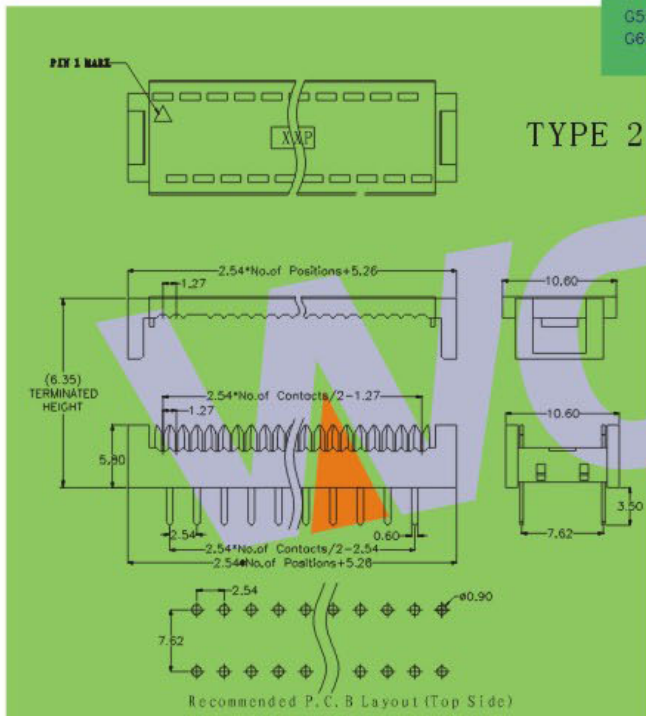

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418