

HSP

NOTES:


Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: PBT + 30%GF (UL94V-0)

Ordering Information

5330-XX B XX B 0 X

- | | | | |
|-------------|------------------|-----------------|------------|
| No. of Pins | Contact Plating | Color Insulator | Series No. |
| 10 30 | G0=Gold Flash | B=Black | 1=3.10mm |
| 14 34 | G1=3u"Gold | G=Grey(427C) | 2=1.90mm |
| 16 40 | G2=5u"Gold | F=Grey(413C) | |
| 18 44 | G3=10u"Gold | | |
| 20 50 | G4=15u"Gold | | |
| 24 60 | G5=30u"Gold | | |
| 26 80 | S0=Gold Flash/Ni | | |
| | S1=3u"Gold/Ni | | |
| | S2=5u"Gold/Ni | | |
| | S3=10u"Gold/Ni | | |
| | S4=15u"Gold/Ni | | |
| | S5=30u"Gold/Ni | | |
| | SN=Tin | | |

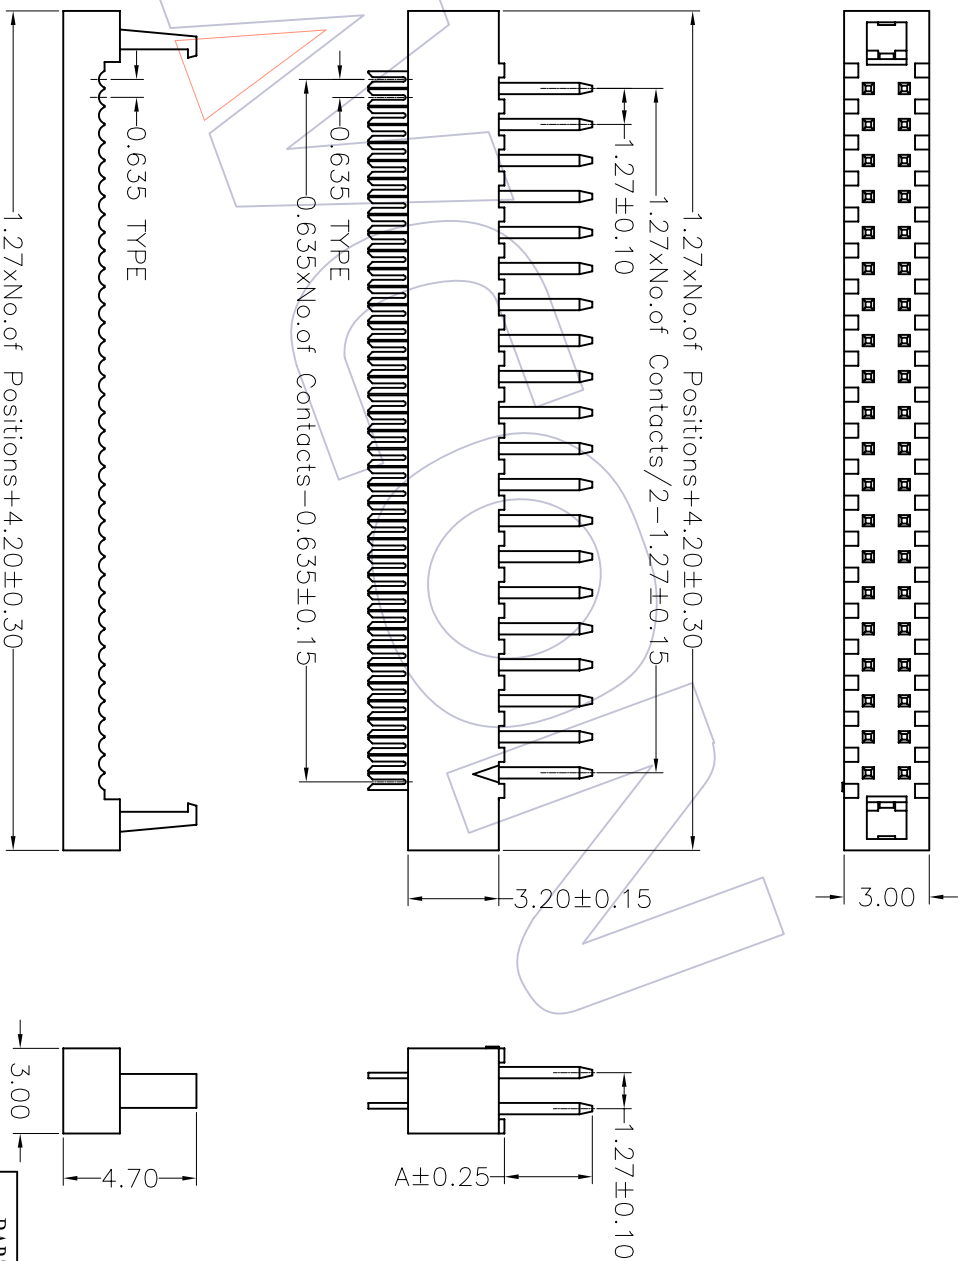

PART NO.	DIM"A"
5330-XXXB01	3.10
5330-XXXB02	1.90

WCON 维峰五金电子有限公司
 WAFE HARDWARE ELECTRONICS CO. LTD

SSE TAB

1.27 DIP PLUG CONNECTOR
 (TERMINATED HEIGHT 5.1)

OPERATION	DRAW	WEIXD	SCALE	PART NO.
X.X	DESIGN		4:1	
X.XX	CHECK		mm	
X.XXX	CHECK		UNIT	
Angle	APPROVE		SIZE	
± 3'			A4	
DIM			SHEET	
TOL			1/1	
CHANGE	APPROVE		PROJ.	
APPROVE			Customer NO.	

REV	DATE	MODIFICATION DESCRIPTION
A0	08/05/26	NEW