HSF

NOTES:
Current Rating:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40℃ to +105℃

Contact Material:Brass
Contact plating:Au or Sn Over Ni
Insulator Material:PBT+30%GF(UL94V−0)

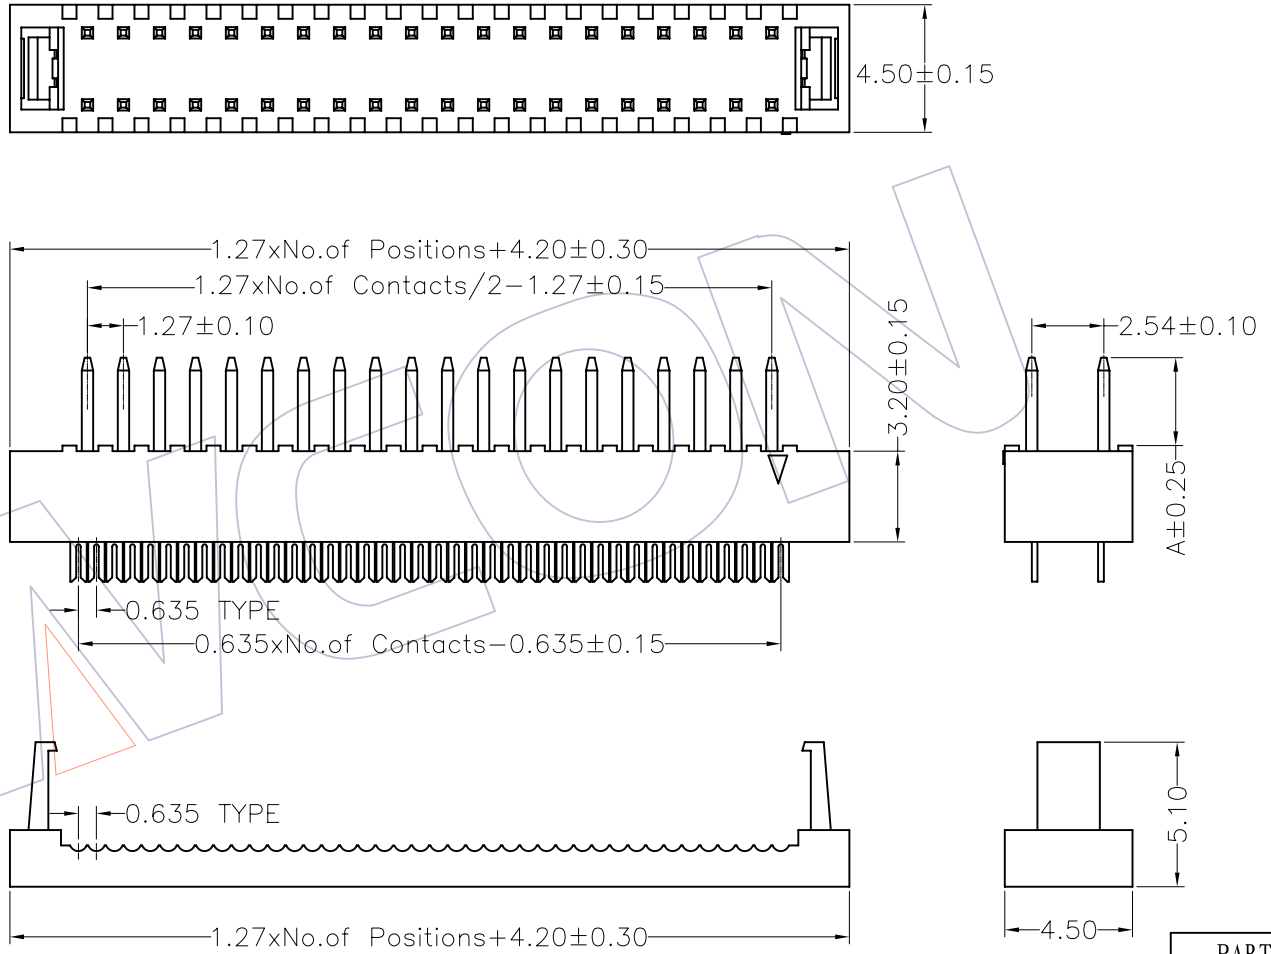

Ordering Information

5340- XX B XX B 0 X

No.of Pins	Contact Plating	Color Insulator	Series No.
10 30	G0=Gold Flash	B=Black	1=3.10mm
14 34	G1=3u"Gold	G=Grey(427C)	2=1.90mm
16 40	G2=5u"Gold	E=Grey(413C)	
18 44	G3=10u"Gold		
20 50	G4=15u"Gold		
24 60	G5=30u"Gold		
26 80	S0=Gold Flash/Ni		
	S1=3u"Gold/Ni		
	S2=5u"Gold/Ni		
	S3=10u"Gold/Ni		
	S4=15u"Gold/Ni		
	S5=30u"Gold/Ni		
	SN=Tin		

PART NO.	DIM"A"
5340-XXBXXB01	3.10
5340-XXBXXB02	1.90

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A0	08/05/26	NEW		

OPERATION		DRAW	WEIXD	08/05/26
X.X	±0.40	DESIGN		
X.XX	±0.25			
X.XXX	±0.15	CHECK		
Angle	± 3°			
DIM	TOL	APPROVE		

SCALE	4:1
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

WCON 维峰五金电子有限公司
WAFE HARDWARE ELECTRONICS CO.LTD

PART NO.	SEE TAB
TITLE:	1.27x2.54 DIP PLUG CONNECTOR (TERMINATED HEIGHT 5.1)
Customer NO.	