

HSPF


NOTES:
 Current Rating:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact plating:Au or Sn Over Ni
 Insulator Material:PBt+30%GF(UL94V-0)

Ordering Information

5343-XX B XX B 0 1

- | | | |
|-------------|------------------|-----------------|
| No. of Pins | Contact Plating | Color Insulator |
| 40 | G0=Gold Flash | B=Black |
| 60 | G1=3u"Gold | G=Grey(427C) |
| 68 | G2=5u"Gold | E=Grey(413C) |
| 80 | G3=10u"Gold | |
| 100 | G4=15u"Gold | |
| | G5=30u"Gold | |
| | S0=Gold Flash/Ni | |
| | S1=3u"Gold/Ni | |
| | S2=5u"Gold/Ni | |
| | S3=10u"Gold/Ni | |
| | S4=15u"Gold/Ni | |
| | S5=30u"Gold/Ni | |
| | SN=Fin | |

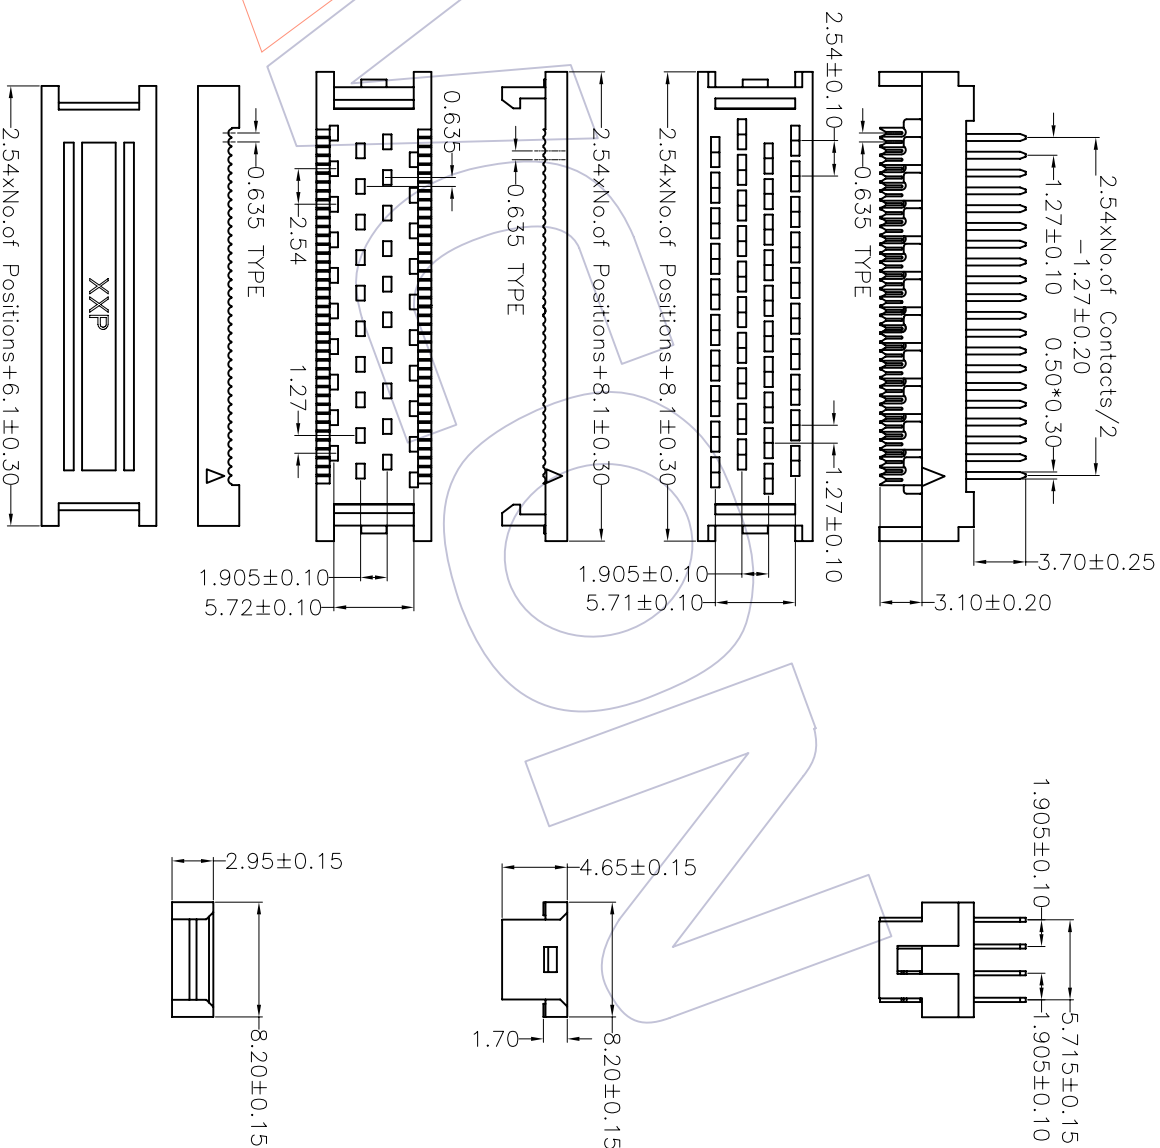

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEI XD	SCALE	PART NO.	TITLE:
A0	08/05/26	NEW			XXX ±0.40	DESIGN	08/05/26	4:1	5343-XXBXXB01	1.27x2.54 DIP PLUG CONNECTOR FOUR ROW FOOT
					XXX ±0.25	CHECK		mm		
					XXX ±0.15	APPROVE		A4		
					Angle ± 3'			1/1		
					DIM TOL			PROJ.	Customer NO.	

WCON 维峰五金电子有限公司
 WAFE HARDWARE ELECTRONICS CO. LTD

5343-XXBXXB01

1 2 3 4 5 6 7 8 9 10