

# HSP

### NOTES:




Current Rating:1.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact plating:Au or Sn Over Ni  
 Insulator Material:PB+T+30%GF(UL94V-0)

## Ordering Information

### 5320-XX B XX B 01

No. of Pins	Contact Plating	Color Insulator
10 30	G0=Gold Flash	B=Black
14 34	G1=3u"Gold	G=Grey(427C)
16 40	G2=5u"Gold	E=Grey(413C)
18 44	G3=10u"Gold	
20 50	G4=15u"Gold	
24 60	G5=30u"Gold	
26 64	S0=Gold Flash/Ni	
	S1=3u"Gold/Ni	
	S2=5u"Gold/Ni	
	S3=10u"Gold/Ni	
	S4=15u"Gold/Ni	
	S5=30u"Gold/Ni	
	SN=Tin	

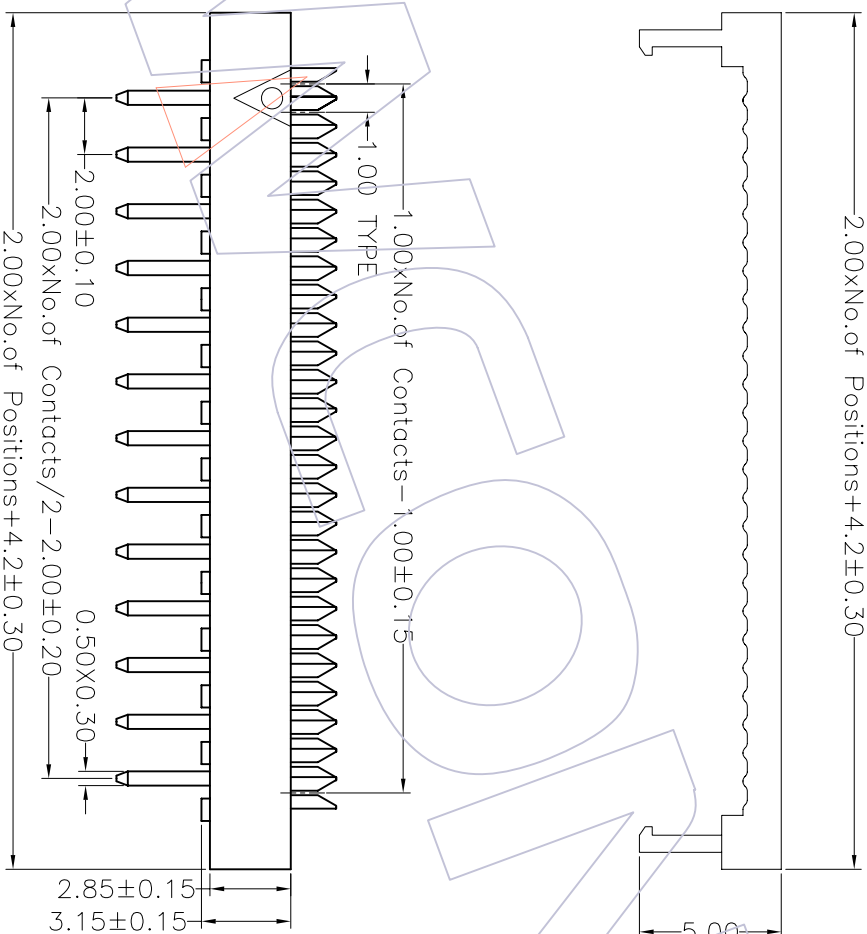

**WCON** 维峰五金电子有限公司  
 WAVE HARDWARE ELECTRONICS CO., LTD

PART NO. 5320-XXBXXB01

TITLE: 2.00 DIP PLUG CONNECTOR

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEI XD	SCALE	PART NO.
A0	08/05/23	NEW			XXX XXX XXX XXX Angle	DESIGN CHECK	08/05/23	4:1 mm A4	5320-XXBXXB01
1					± 3'	APPROVE		1/1	2.00 DIP PLUG CONNECTOR

1 2 3 4 5 6 7 8 9 10