

HSP

NOTES:


Current Rating:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact plating:Au or Sn Over Ni
 Insulator Material:PBTT+30%GF(UL94V-0)

Ordering Information

5310-XX B XX B 01

- | | | |
|------------|------------------|-----------------|
| No.of Pins | Contact Plating | Color Insulator |
| 06 30 | G0=Gold Flash | B=Black |
| 08 34 | G1=3u"Gold | G=Grey(427C) |
| 10 36 | G2=5u"Gold | B=Grey(413C) |
| 14 40 | G3=10u"Gold | |
| 16 50 | G4=15u"Gold | |
| 20 60 | G5=30u"Gold | |
| 24 64 | S0=Gold Flash/Ni | |
| 26 | S1=3u"Gold/Ni | |
| | S2=5u"Gold/Ni | |
| | S3=10u"Gold/Ni | |
| | S4=15u"Gold/Ni | |
| | S5=30u"Gold/Ni | |
| | SN=Tin | |

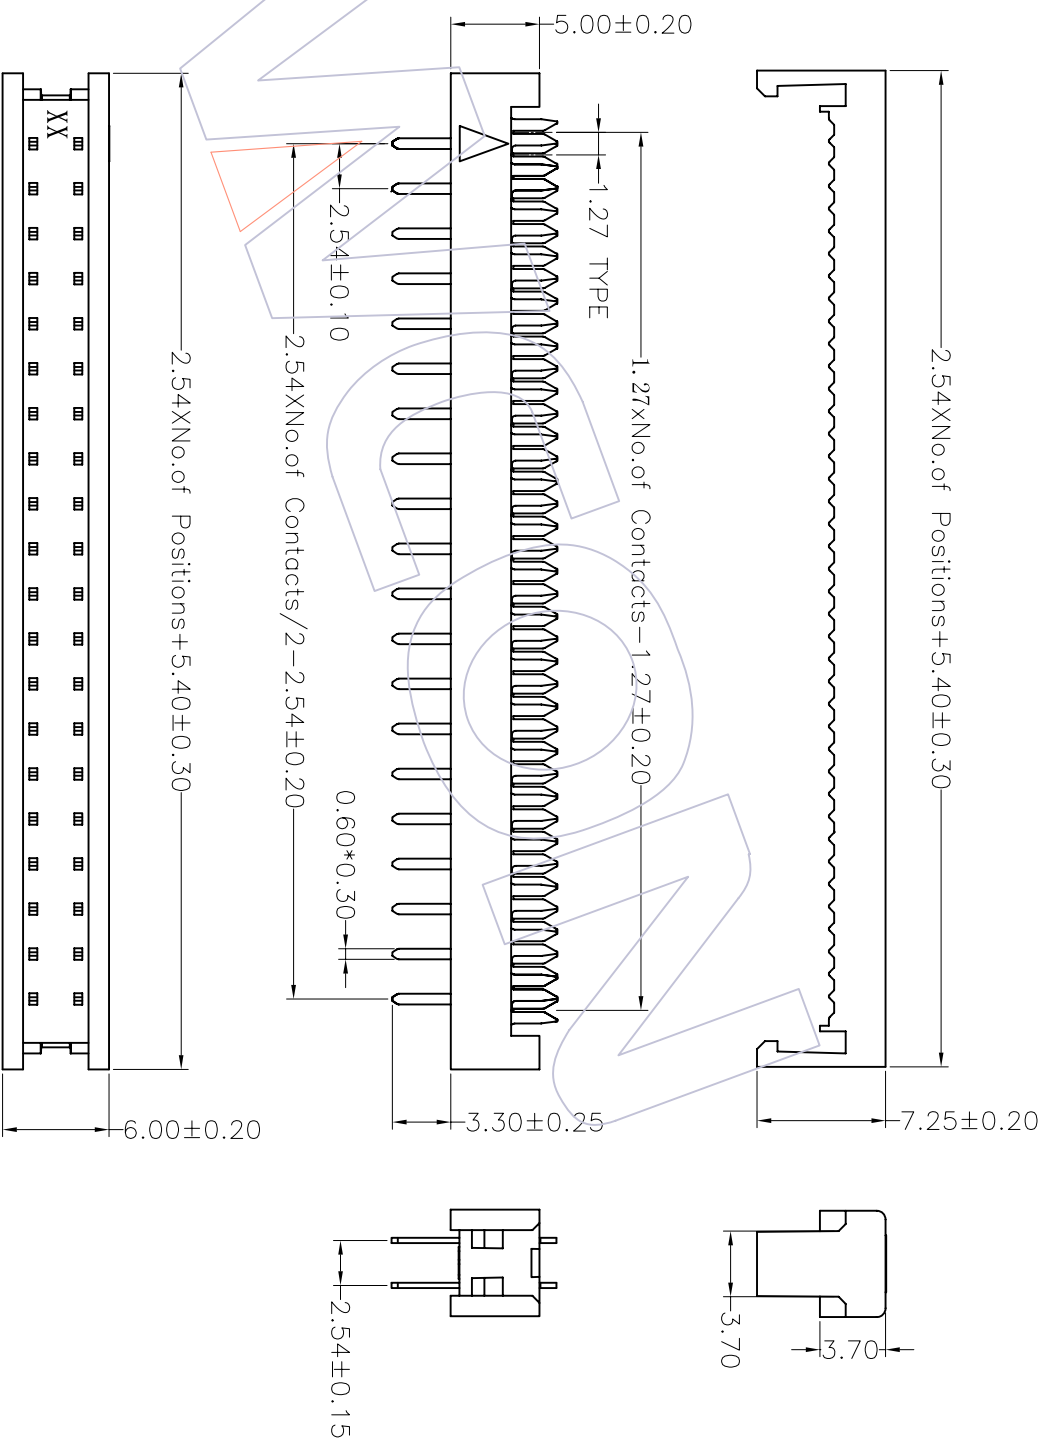

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEI XD	SCALE	PART NO.
A0	08/05/23	NEW			X.X ±0.40	DESIGN	08/05/23	2.5:1	5310-XXBXXB01
					X.XX ±0.25	CHECK			WAVE HARDWARE ELECTRONICS CO. LTD
					X.XXX ±0.15	APPROVE			维峰五金电子有限公司
					Angle ± 3'				WAFFER HARDWARE ELECTRONICS CO. LTD
					DIM TOL				5310-XXBXXB01
									2.54 DIP PLUG CONNECTOR (TERMINATED HEIGHT 7.2)

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD

5310-XXBXXB01

2.54 DIP PLUG CONNECTOR (TERMINATED HEIGHT 7.2)