

# HSP

### NOTES:



Current Rating:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact plating:Au or Sn Over Ni  
 Insulator Material:PBT+30%GF(UL94V-0)

## Ordering Information

### 5311-XX B XX B 01

No.of Pins	Contact Plating	Color Insulator
06 30	G0=Gold Flash	B=Black
08 34	G1=3u"Gold	G=Grey(427C)
10 36	G2=5u"Gold	B=Grey(413C)
14 40	G3=10u"Gold	
16 50	G4=15u"Gold	
20 60	G5=30u"Gold	
24 64	S0=Gold Flash/Ni	
26	S1=3u"Gold/Ni	
	S2=5u"Gold/Ni	
	S3=10u"Gold/Ni	
	S4=15u"Gold/Ni	
	S5=30u"Gold/Ni	
	SN=Tin	

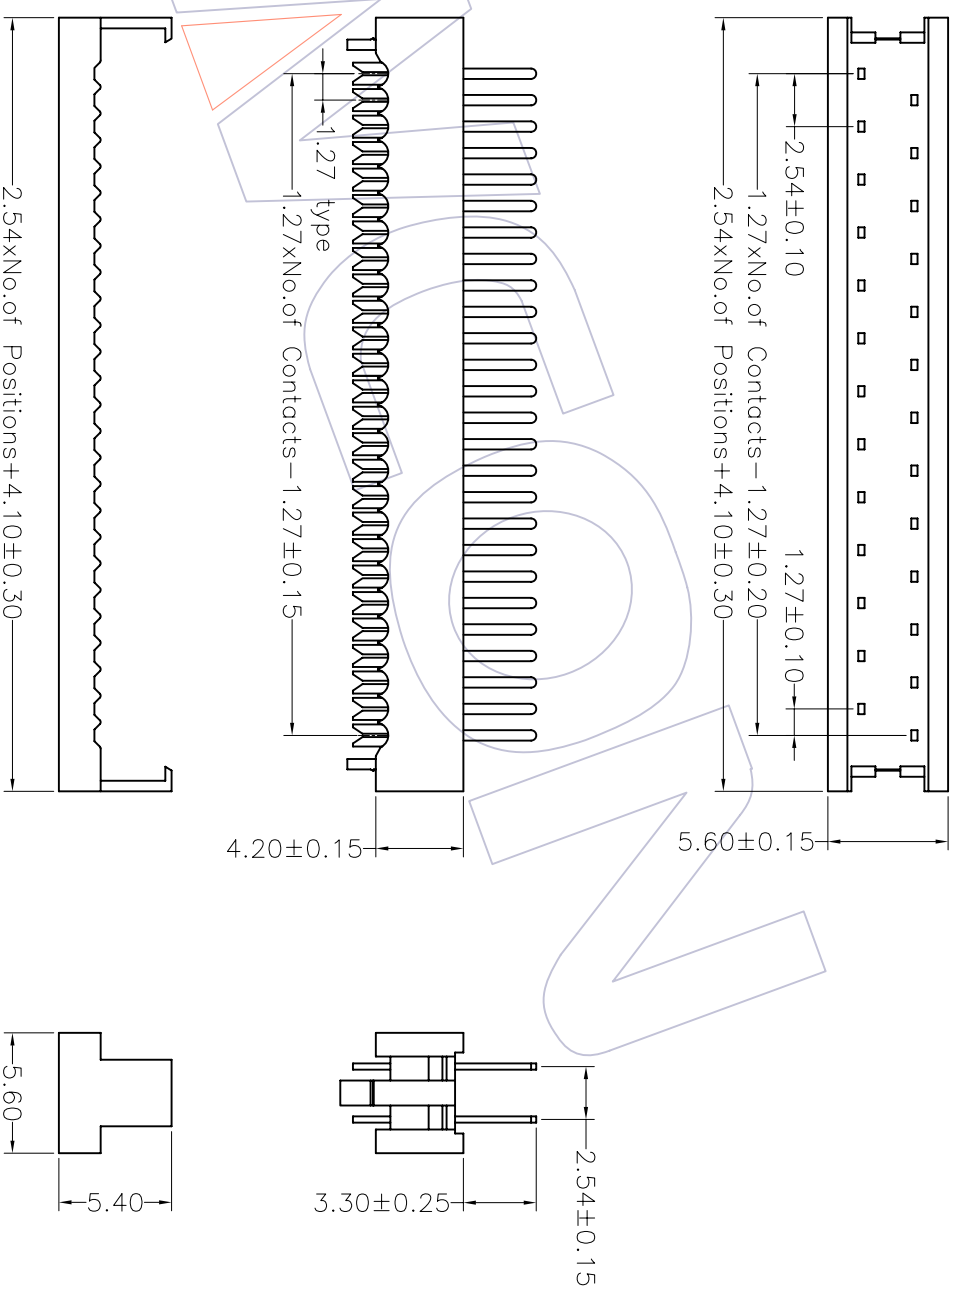

OPERATION	DRAW	WEIYXD	SCALE	PART NO.
X.X	DESIGN	08/05/23	2.5:1	
X.XX	CHECK		mm	TITLE:
X.XXX	APPROVE		A4	
Angle			1/1	2.54 DIP PLUG CONNECTOR (TERMINATED HEIGHT 6.0mm)
± .3'			PROJ.	Customer NO.

**WCON** 维峰五金电子有限公司  
 WAFER HARDWARE ELECTRONICS CO.,LTD

H

H

G

G

F

F

E

E

D

D

C

C

B

B

A

A

1 2 3 4 5 6 7 8 9 10