

HSP

NOTES:


Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: PBT+30%GF(UL94V-0)


Ordering Information

5350-XX B XX B 0 X



No. of Pins	Contact Plating	Color Insulator	Series No.
06 30	G0=Gold Flash	B=Black	1=TYPE 1
08 34	G1=3u"Gold	G=Grey(427C)	2=TYPE 2
10 36	G2=5u"Gold	E=Grey(413C)	
14 40	G3=10u"Gold		
16 50	G4=15u"Gold		
20 60	G5=30u"Gold		
24 64	S0=Gold Flash/Ni		
26	S1=3u"Gold/Ni		
	S2=5u"Gold/Ni		
	S3=10u"Gold/Ni		
	S4=15u"Gold/Ni		
	S5=30u"Gold/Ni		
	SN=Ti		

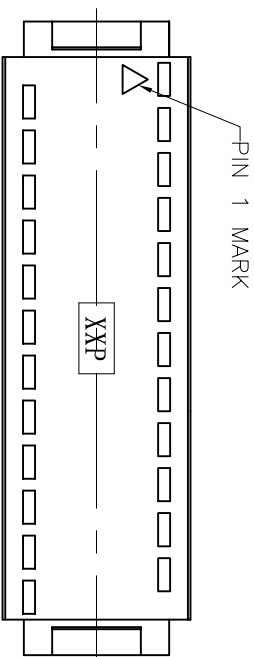

TYPE 2

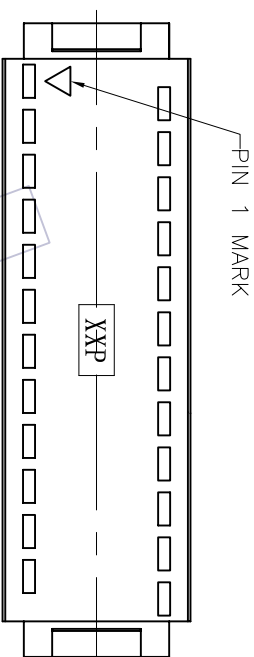

TYPE 1

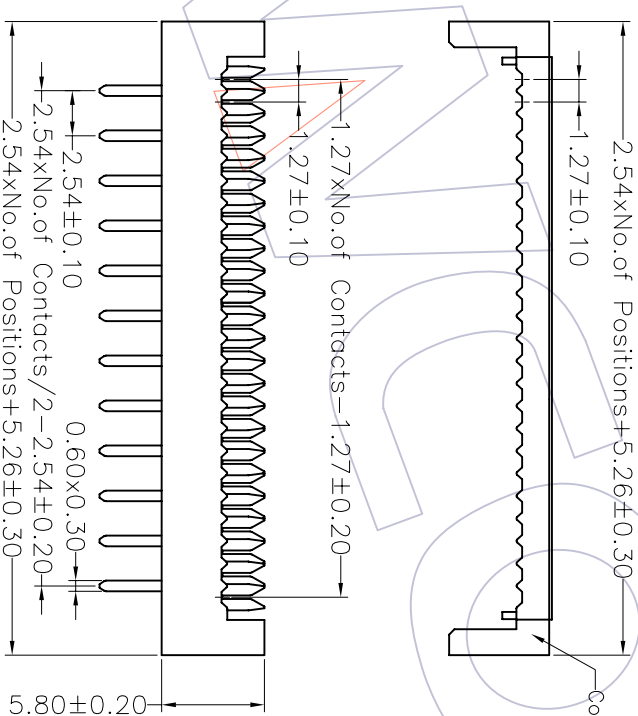

TYPE	PART NO.
TYPE 1	5350-XXBXXB01
TYPE 2	5350-XXBXXB02

REV	DATE	MODIFICATION DESCRIPTION	CHANGE APPROVE	OPERATION	DRAW	WEIYXD	SCALE	PART NO.	SEE TAB
A0	08/05/23	NEW		XXX ±0.40 XXX ±0.25 XXX ±0.15 Angle ± 3'	DESIGN CHECK		UNIT mm SIZE A4	2.54x7.62 DIP PLUG CONNECTOR (TERMINATED HEIGHT 5.8)	
1									

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD

SEE TAB

2.54x7.62 DIP PLUG CONNECTOR
 (TERMINATED HEIGHT 5.8)

Customer NO.