



TERMINAL

# 1. 27mm Micro Match Socket DIP Type


## SPECIFICATIONS



Current Rating: 1.0AMP  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : 500V AC/Minute  
 Operation Temperature: -40°C to +105°C  
 Contact Material: Phosphor Bronze  
 Contact plating: Tin Plated  
 Insulator Material: Polyester (UL94V-0)  
 StandArd: PA46+30%GF

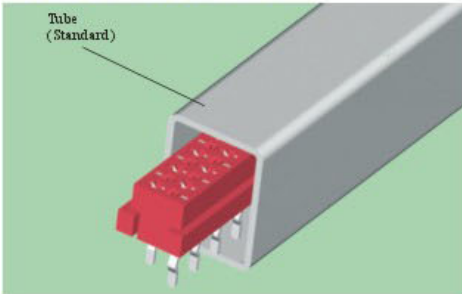

3900-XXFSXXXNX1

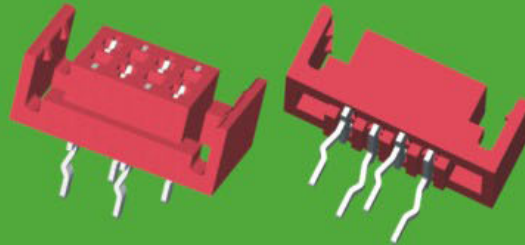

3900-XXFSXXXWX1

## 3900-XX F S XX X X X 1








NO.OF PINS  
04~20P

CONTACT PLATING  
 G0:1u" Gold S0:1u" Gold/Tin  
 G1:3u" Gold S1:3u" Gold/Tin  
 G2:5u" Gold S2:5u" Gold/Tin  
 G3:10u"Gold S3:10u"Gold/Tin  
 G4:15u"Gold S4:15u"Gold/Tin  
 G5:30u"Gold S5:30u"Gold/Tin  
 G6:20u"Gold S6:20u"Gold/Tin  
 SN:Tin

INSULATOR MATERIAL  
 A:PBT  
 C:PA6T  
 E:PA46

LATCH SHAPE  
 W:With Latch  
 N:Without Latch

PACKING  
 A:Tray T:Tube  
 R:Tape&Reel



※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920  
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418