




TERMINAL

1.27mm Micro Match Socket

SPECIFICATIONS



Current Rating: 1.0AMP
 Contact Resistance: 20m Ω Max.
 Insulation Resistance: 1000M Ω Min.
 Withstanding Voltage : 500V AC/Minute
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze
 Contact plating: Tin Plated
 Insulator Material: Polyester (UL94V-0)
 Standard: PA46+30%GF

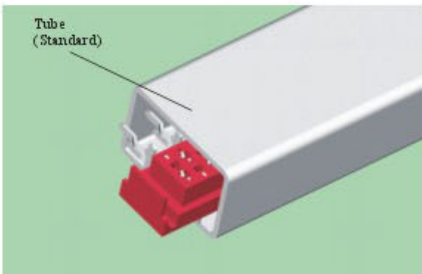

3900-XXFRXXXWX1

3900-XXFRXXXNX1

3900-XX F R XX X X X 1





NO.OF PINS
04~20P

CONTACT PLATING
 G0:1u" Gold S0:1u" Gold/Tin
 G1:3u" Gold S1:3u" Gold/Tin
 G2:5u" Gold S2:5u" Gold/Tin
 G3:10u"Gold S3:10u"Gold/Tin
 G4:15u"Gold S4:15u"Gold/Tin
 G5:30u"Gold S5:30u"Gold/Tin
 G6:20u"Gold S6:20u"Gold/Tin
 SN: Tin

INSULATOR MATERIAL
 A:PBT
 C:PA6T
 E:PA46

LATCH SHAPE
 W:With Latch
 N:Without Latch

PACKING
 A:Tray T:Tube
 R:Tape&Reel

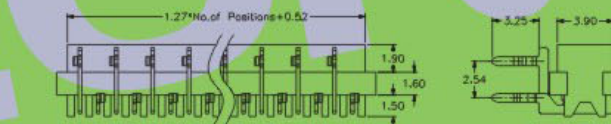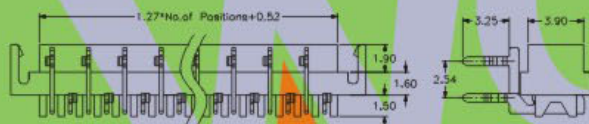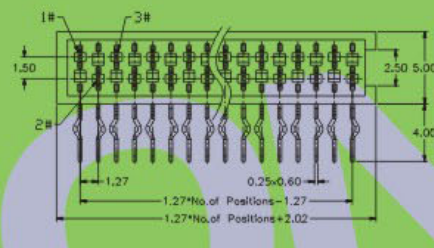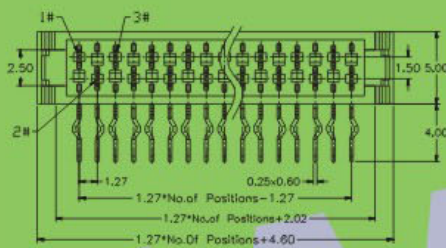

Recommended P. C. B Layout (Top Side)

Recommended P. C. B Layout (Top Side)

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418