

Terminated With Pitch
 1.27mm Flat Cable




1.27mm Micro Box Plug IDC


SPECIFICATIONS



Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 500V AC/Minute
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT+30%GF

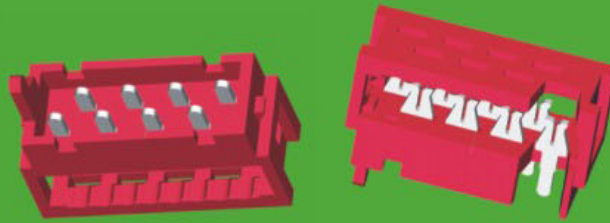



3900-XXFIXXXNX1

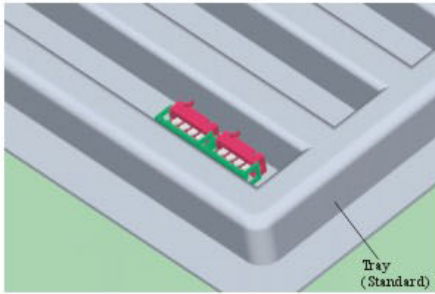

Tray
(Standard)

3900-XX M I XX X X X 1

NO. OF PINS 04~20P	CONTACT PLATING G0:1u" Gold S0:1u" Gold/Tin G1:3u" Gold S1:3u" Gold/Tin G2:5u" Gold S2:5u" Gold/Tin G3:10u"Gold S3:10u"Gold/Tin G4:15u"Gold S4:15u"Gold/Tin G5:30u"Gold S5:30u"Gold/Tin G6:20u"Gold S6:20u"Gold/Tin SN:Tin	INSULATOR MATERIAL A:PBT C:PA6T E:PA46	LATCH SHAPE W:With Latch N:Without Latch	PACKING A:Tray T:Tube R:Tape&Reel
------------------------------	---	--	---	--

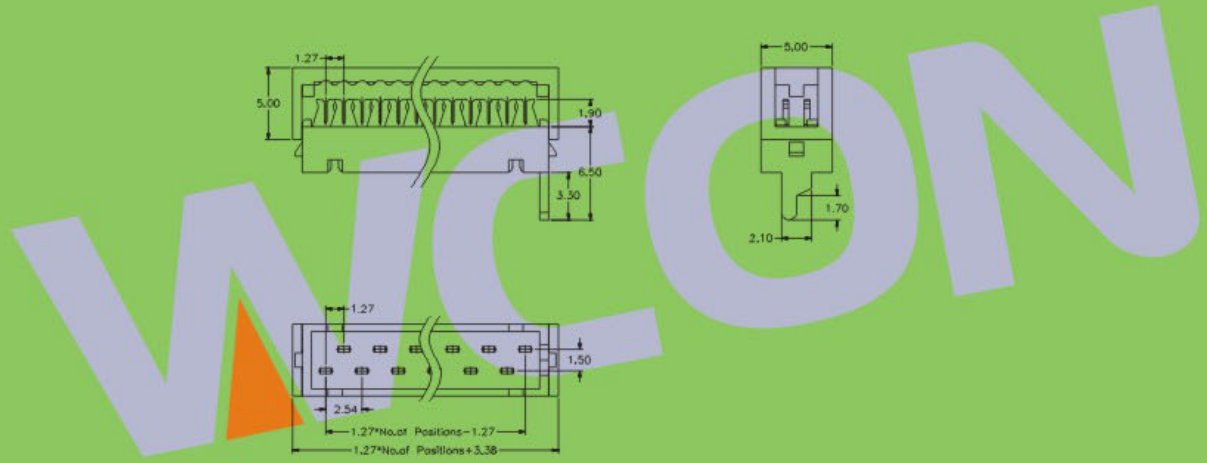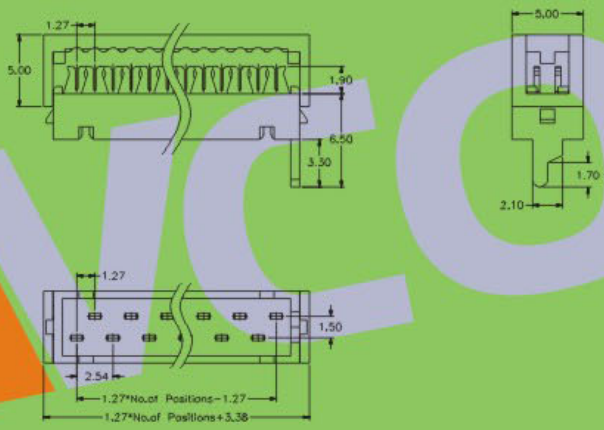

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418