WCON®
HTTP:WWW.WAFE-CHINA.COM



Terminated With Pitch
0.635mm Flat Cable

1.27*1.27mm DIP Plug

SPECIFICATIONS

FILE NO.E248993

Current Rating: 0.5AMP
Contact Resistance: 30mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage : 250V AC/Minute
Operation Temperature: −40°C to+105°C
Contact Material: Phosphor Bronze
Contact plating: Au or Sn Over Ni
Insulator Material: Polyester (UL94V−0)
Standard: PBT+30%GF

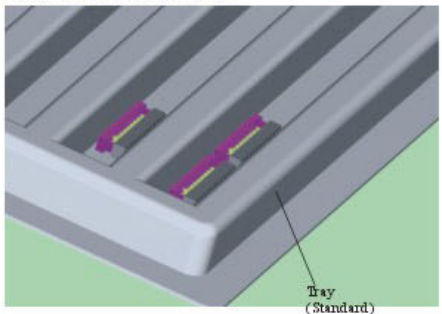

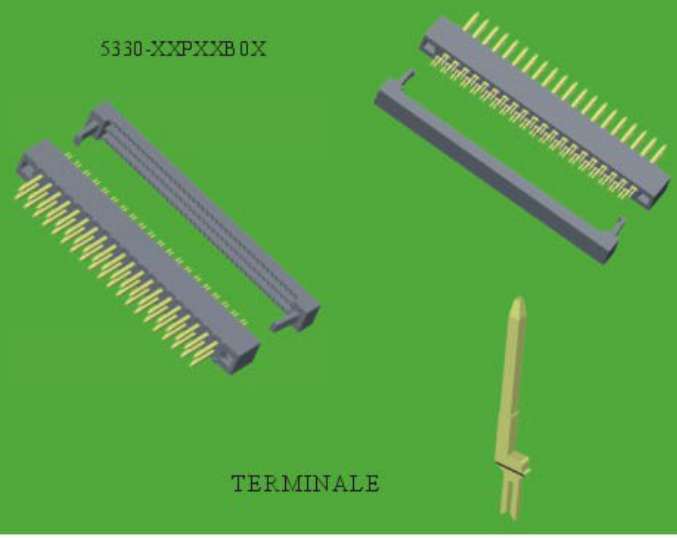

5330- XX P XX B

NO.OF PINS
06~80P

CONTACT PLATING

G0:1u" Gold	S0:1u" Gold/Tin
G1:3u" Gold	S1:3u" Gold/Tin
G2:5u" Gold	S2:5u" Gold/Tin
G3:10u"Gold	S3:10u"Gold/Tin
G4:15u"Gold	S4:15u"Gold/Tin
G5:30u"Gold	S5:30u"Gold/Tin
G6:20u"Gold	S6:20u"Gold/Tin
	SN:Tin

INSULATOR COLOUR
B:Black G:Grey(427C)
E:Grey(413C)

PART NO.	DIM"A"
5330−XXPXXB01	3.10
5330−XXPXXB02	1.90

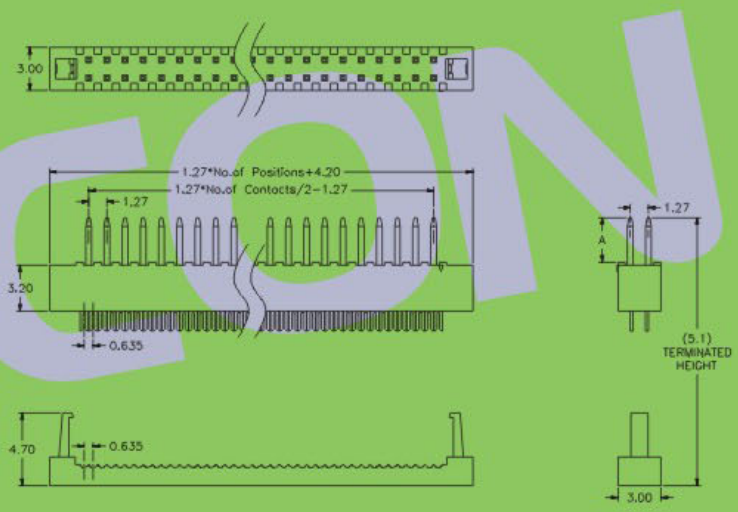

Recommended P.C.B Layout (Top Side)

※ ※INNOVATION AND DEVELOPMENT ※ ※CONTINUAL IMPROVEMENT ※ ※QUALITY FOREMOST ※ ※CUSTOMER SATISFACTION ※ ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com
WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418