


# 1. 27\*2.54mm DIP Plug

## SPECIFICATIONS



Current Rating: 1.0AMP  
 Contact Resistance: 30m Ω Max.  
 Insulation Resistance: 1000M Ω Min.  
 Withstanding Voltage : 250V AC/Minute  
 Operation Temperature: -40°C to +105°C  
 Contact Material: Phosphor Bronze  
 Contact plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PBT+30%GF

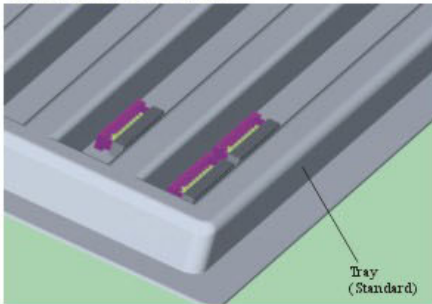



## 5340- XX P XX B 0X

NO.OF PINS  
06~80P

CONTACT PLATING  
 G0:1u" Gold S0:1u" Gold/Tin  
 G1:3u" Gold S1:3u" Gold/Tin  
 G2:5u" Gold S2:5u" Gold/Tin  
 G3:10u"Gold S3:10u"Gold/Tin  
 G4:15u"Gold S4:15u"Gold/Tin  
 G5:30u"Gold S5:30u"Gold/Tin  
 G6:20u"Gold S6:20u"Gold/Tin  
 SN:Tin

INSULATOR COLOUR  
 B:Black G:Grey(427C)  
 E:Grey(413C)

PART NO.	DIM "A"
5340-XXPXXB01	3.10
5340-XXPXXB02	1.90

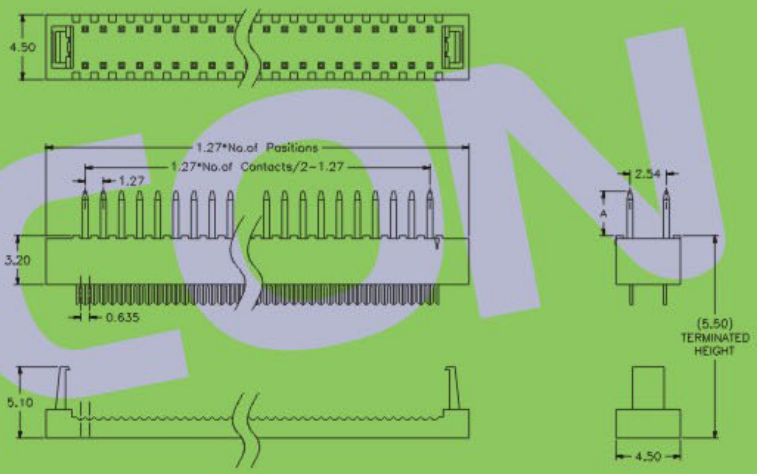

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920  
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418