

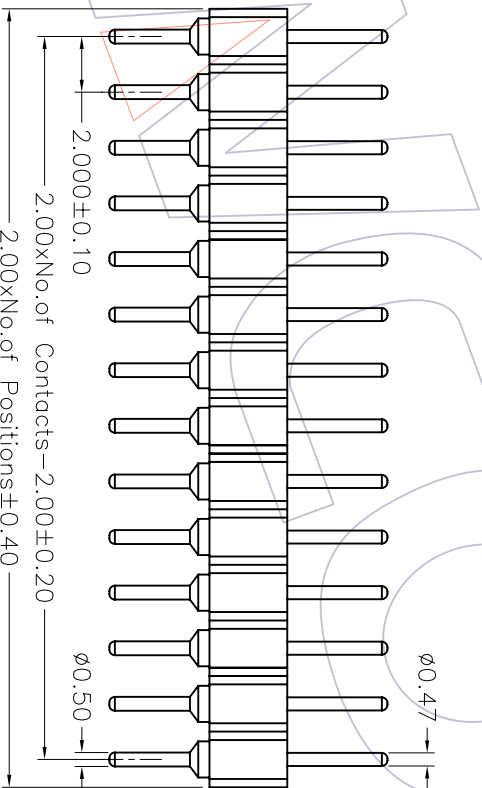



HSP

TECHNICAL SPECS:

Current Rating: 3.0AMP
 Contact Resistance: 10mΩ Max
 Dielectric Strength: Min 1000V/RMS
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C360000)
 Connecting Pin: $\phi 0.47$ mm
 Contact plating: Au or Sn over Ni
 Insulator Material: PPS+30%G.F(UL94V-0)

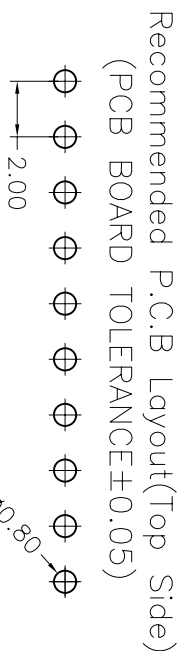

Ordering Information

3512-281 XX S XX 100 X 1

- No. of Pin: 2-40PIN
- Contact Plating: G0=Gold Flash, G1=3u"Gold, G2=5u"Gold, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold
- S0=Gold Flash/Tin
- S1=3u"Gold/Tin
- S2=5u"Gold/Tin
- S3=10u"Gold/Tin
- S4=15u"Gold/Tin
- S5=30u"Gold/Tin
- SN=Tin
- Packing: A=Tray, T=Tube

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	SCALE	PART NO.	TITLE:
A0	08/10/17	NEW			XXX XXX XXX	DESIGN CHECK	08/10/17	1:1 mm	3512-281XXSX100X1	2.00mm MACHINED PIN HEADER SINGLE ROW 180° H=2.80 L=10.0
1					XXX XXX XXX	DESIGN CHECK				
					Angle DIM	CHECK				
					± 3'	APPROVE				
					TOL	PROU.				

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO. LTD