

HSP

TECHNICAL SPECS:

Current Rating: 3.0AMP
 Contact Resistance: 10mΩ Max
 Dielectric Strength: Min 1000Vrms
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C



Sleeve: Brass CuZn36Pb3(C360000)
 Connecting Pin: $\phi 0.47$ mm
 Contact plating: Au or Sn over Ni
 Insulator Material: PPS+30%G.F.(UL94V-0)

Ordering Information

3512-282 XX S XX 100 X 1

No. of Pin 2-40PIN
 Contact Plating G0=Gold Flash
 G1=3u"Gold
 G2=5u"Gold
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S1=3u"Gold/Tin
 S2=5u"Gold/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin

Packaging
 A=Tray
 T=Tube

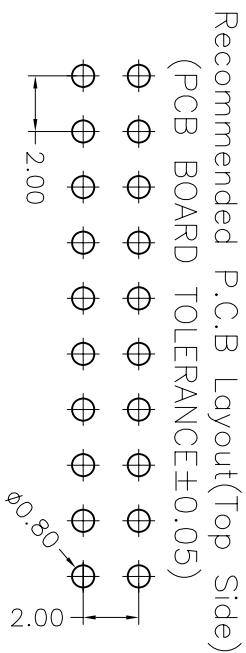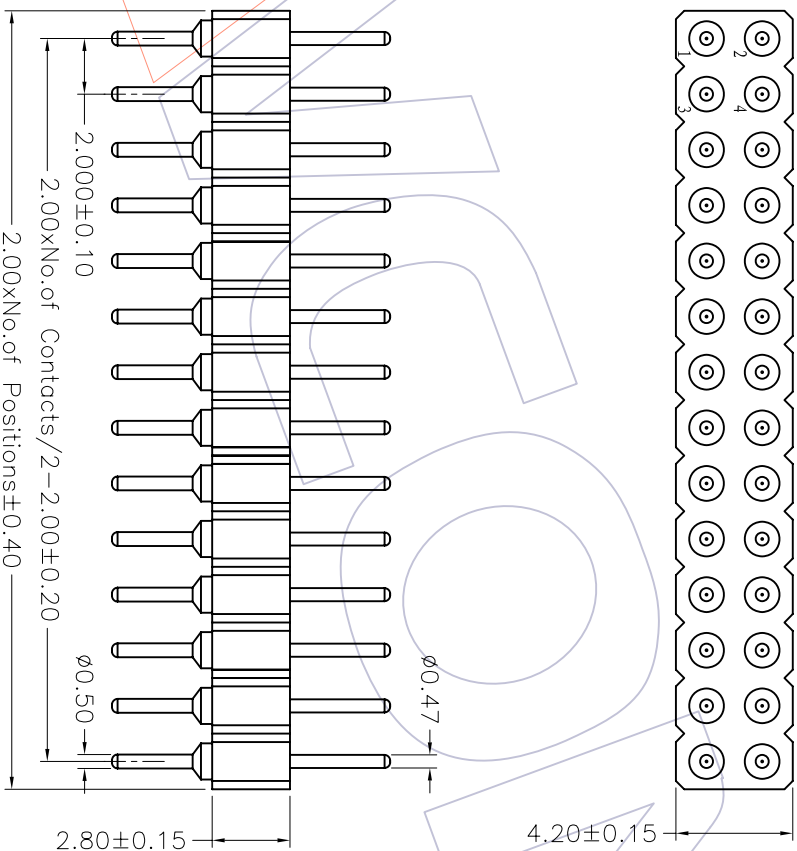

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	WEIXD	08/10/17	SCALE		PART NO.	TITLE:
					XXX	± 0.40				UNIT	1:1		
AO	08/10/17	NEW			XXX	± 0.25	DESIGN			mm		3512-282XXSX100X1	2.00mm MACHINED PIN HEADER DIAL ROW 180° H=2.80 L=10.0
					X.XXX	± 0.15	CHECK						
					Angle	$\pm 3'$	APPROVE						
					DIM	TOL							Customer NO.

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO.,LTD