

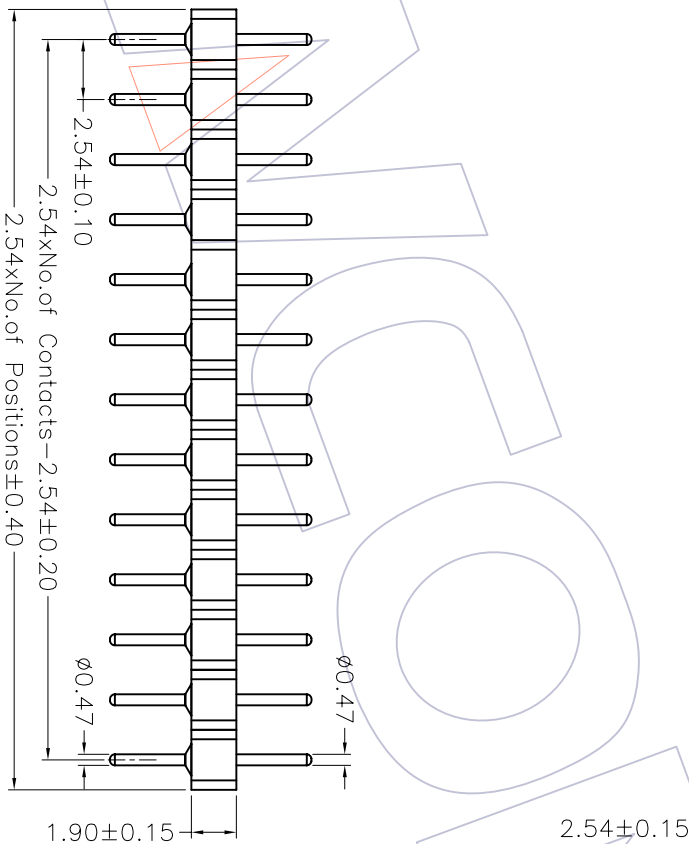



HSHF

TECHNICAL SPECS:

Current Rating: 3.0AMP
 Contact Resistance: 10mΩ Max
 Dielectric Strength: Min 1000Vrms
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000)
 Connecting Pin: ϕ 0.47mm
 Contact plating: Au or Sn over Ni
 Insulator Material: PPS+30%G.F.(UL94V-0)

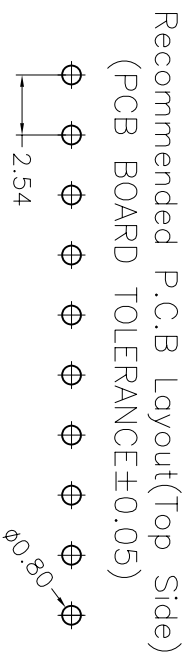

Ordering Information

3510-191 XX S XX 085 X 1

- | | | |
|-----------------------|---|-------------------------------|
| No. of Pin
1~40PIN | Contact Plating
G0=Gold Flash
G1=3u"Gold
G2=5u"Gold
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
S0=Gold Flash/Tin
S1=3u"Gold/Tin
S2=5u"Gold/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
SN=Tin | Packaging
A=Tray
T=Tube |
|-----------------------|---|-------------------------------|

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	WEIXD	08/10/10	SCALE		PART NO.	TITLE:
					XXX	\pm 0.40				DESIGN	UNIT		
A0	08/10/10	NEW			XXX	\pm 0.25	CHECK	A4	3510-191XXSX085X1	2.54mm MACHINED PIN HEADER SINGLE ROW 180° ϕ =1.90 L=8.52			
					Angle	\pm 3'	APPROVE						
					DIM	TOL							

WCON 维峰五金电子有限公司
 WAFER HARDWARE ELECTRONICS CO., LTD