
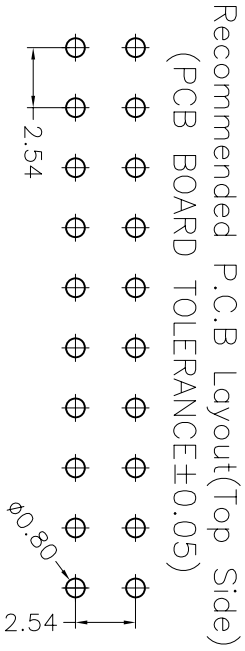


HSP

TECHNICAL SPECS:

Current Rating: 3.0AMP
 Contact Resistance: 10mΩ Max
 Dielectric Strength: Min 1000Vrms
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C



Sleeve: Brass CuZn36Pb3(C36000)
 Connecting Pin: $\phi 0.47$ mm
 Contact plating: Au or Sn over Ni
 Insulator Material: PPS+30%G.F(UL94V-0)

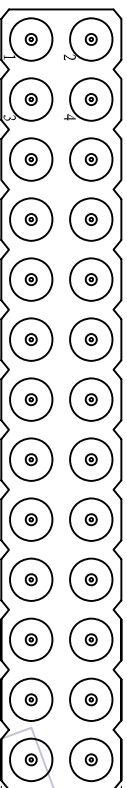

Ordering Information

3510-192 XX S XX 076 X 1

- | | | |
|-----------------------|--|-------------------------------|
| No. of Pin
2-40PIN | Contact Plating
G0=Gold Flash
G1=3u"Gold
G2=5u"Gold
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold | Packaging
A=Tray
T=Tube |
| | SO=Gold Flash/Tin
S1=3u"Gold/Tin
S2=5u"Gold/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
SN=Tin | |

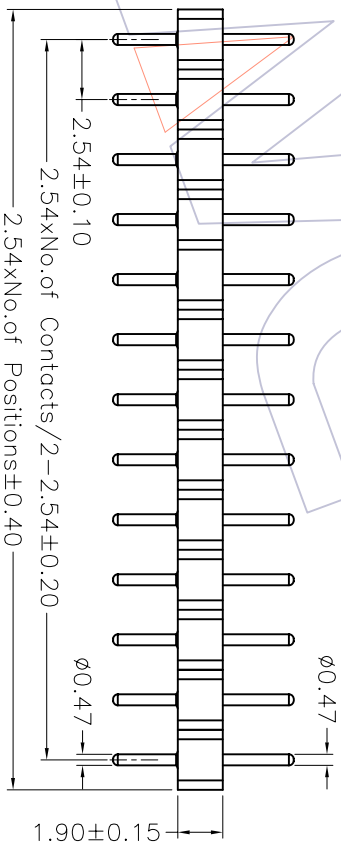

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	WEIXD	SCALE	PART NO.	TITLE:
A0	08/10/17	NEW			XXX ±0.40 XXX ±0.25 XXX ±0.10 Angle ± 3'	DESIGN CHECK	08/10/17	1:1 mm A4	3510-192XXSX076X1	2.54mm MACHINED PIN HEADER DUAL ROW 180° H=1.90 L=7.64
1										

WCON 维峰五金电子有限公司
 WAFE HARDWARE ELECTRONICS CO. LTD