




CONTACT CLIP

SLEEVE


# 1.778mm IC Socket

## SPECIFICATIONS

Insulator: Black glass filled polyester PBT+30%GF  
 Flammability: UL94V-0  
 Sleeve: Brass CuZn 36pb3(36000)  
 Contact clip(6 finger):Beryllium copper (C17200)  
 Mating pin:0.40 to 0.56mm  
 Forces:(polished steel gauge 0.46mm)  
 -Insetion:2.0N typ. -Winthdrawal:1.0N typ.  
 Mechanical life :min 100 cycles  
 Rated current:1.0A  
 Contact resistance: max 10mΩ  
 Dielectric strength :min 1000VRMX

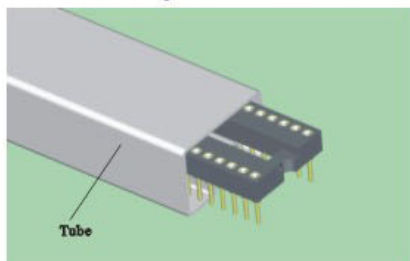

Tube

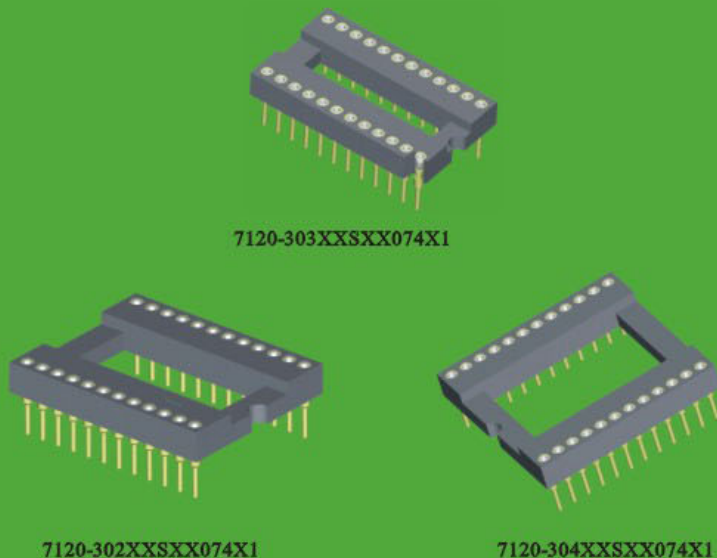

7120-303XXSXX074X1

7120-302XXSXX074X1

7120-304XXSXX074X1

**7120-30 X XX S XX 074 X 1**


ROW OF PITCH  
 2:15.24 3:10.16  
 4:19.05

NO.OF PINS  
 PER ROW  
 12~32

CONTACT PLATING  
 S0:1u" Gold/Tin S4:15u"Gold/Tin  
 S1:3u" Gold/Tin S5:30u"Gold/Tin  
 S2:5u" Gold/Tin S6:20u"Gold/Tin  
 S3:10u"Gold/Tin SN:Tin

PACKING  
 A:Tray T:Tube  
 R:Tape & Reel  
 O: PE Bag

PART NO.	NO. OF POSITIONS	DIM "A"	ROW PITCH DIM "B"	DIM "C"
7120-30324SXX074X1	24	21.80	10.16	12.70
7120-30328SXX074X1	28	25.20	10.16	12.70
7120-30330SXX074X1	30	27.00	10.16	12.70
7120-30332SXX074X1	32	28.80	10.16	12.70
7120-30348SXX074X1	48	43.10	10.16	12.70
7120-30220SXX074X1	20	18.10	15.24	17.64
7120-30224SXX074X1	24	21.70	15.24	17.64
7120-30228SXX074X1	28	25.20	15.24	17.64
7120-30240SXX074X1	40	35.80	15.24	17.64
7120-30242SXX074X1	42	37.70	15.24	17.64
7120-30248SXX074X1	48	43.10	15.24	17.64
7120-30252SXX074X1	52	46.70	15.24	17.64
7120-30256SXX074X1	56	50.20	15.24	17.64
7120-30264SXX074X1	64	57.30	15.24	17.64
7120-30268SXX074X1	68	60.90	15.24	17.64
7120-30464SXX074X1	64	57.30	19.05	21.45

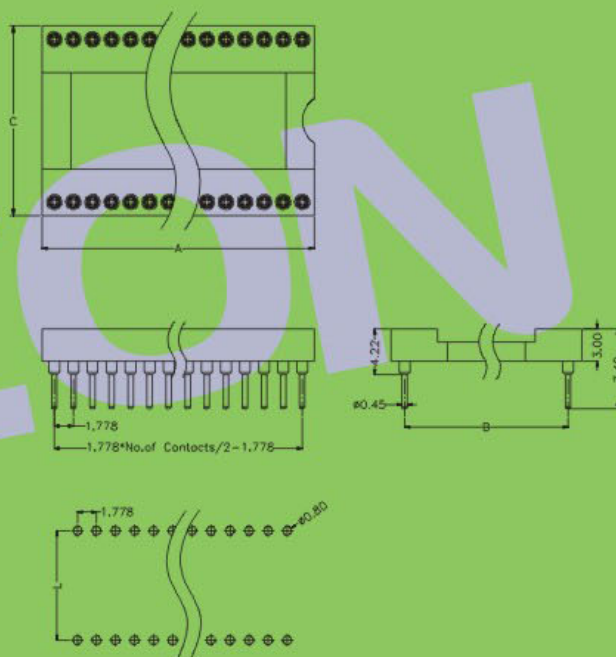

Recommended P. C. B Layout (top side)

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920  
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418