



CONTACT


1.778mm IC Header

SPECIFICATIONS


Insulator: Black glass filled polyester PBT+30%GF
 Flammability: UL94V-0
 Contact: Brass CuZn 36pb3(36000)
 Connecting pin ϕ : 0.50
 Mechanical life :min 500 cycles
 Rated resistance:1.0A
 Contact resistance: max 10m Ω
 Dielectric strength :min 1000VRMX




FILE NO.E248993

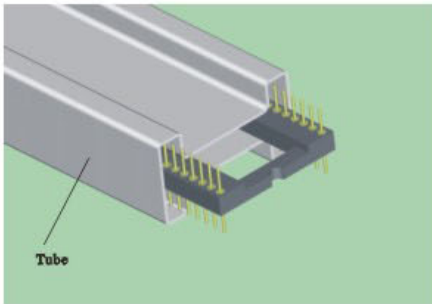


Tube



3561-303XXSXX100X1



3561-302XXSXX100X1



3561-304XXSXX100X1

3561-30 X XX S XX 100 X 1


ROW OF PITCH
 2:15.24 3:10.16
 4:19.05

NO.OF PINS
 PER ROW
 12~32

CONTACT PLATING
 S0:1u" Gold/Tin S4:15u"Gold/Tin
 S1:3u" Gold/Tin S5:30u"Gold/Tin
 S2:5u" Gold/Tin S6:20u"Gold/Tin
 S3:10u"Gold/Tin S9:Tin

PACKING
 A:Tray T:Tube
 R:Tape & Reel
 O: PE Bag

PART NO.	NO. OF POSITIONS	DIM "A"	ROW PITCH DIM "B"	DIM "C"
3561-30324SXX100X1	24	21.80	10.16	12.70
3561-30328SXX100X1	28	25.20	10.16	12.70
3561-30330SXX100X1	30	27.00	10.16	12.70
3561-30332SXX100X1	32	28.80	10.16	12.70
3561-30348SXX100X1	48	43.10	10.16	12.70
3561-30220SXX100X1	20	18.10	15.24	17.64
3561-30224SXX100X1	24	21.70	15.24	17.64
3561-30228SXX100X1	28	25.20	15.24	17.64
3561-30240SXX100X1	40	35.80	15.24	17.64
3561-30242SXX100X1	42	37.70	15.24	17.64
3561-30248SXX100X1	48	43.10	15.24	17.64
3561-30252SXX100X1	52	46.70	15.24	17.64
3561-30256SXX100X1	56	50.20	15.24	17.64
3561-30264SXX100X1	64	57.30	15.24	17.64
3561-30268SXX100X1	68	60.90	15.24	17.64
3561-30464SXX100X1	64	57.30	19.05	21.45

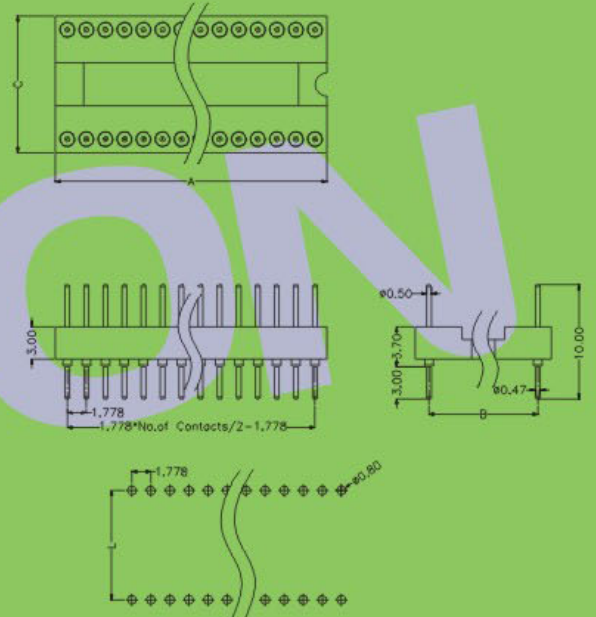

Recommended P. C. B Layout (top side)

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418