



CONTACT CLIP





SLLEEVE


2.54mm IC Socket

SPECIFICATIONS


Insulator: Black glass filled polyester PBT+30%GF
 Flammability: UL94V-0
 Sleeve: Brass CuZn 36pb3(36000)
 Contact clip(4 finger): Beryllium copper (C17200)
 Mating pin ϕ : 0.40 to 0.56mm
 Forces: (polished steel gauge ϕ 0.43mm)
 -Insetion: 2.0N typ. -Winthdrawal: 1.0N typ.
 Mechanical life :min 100 cycles
 Rated cument: 1.0A
 Contact resistance: max 10m Ω
 Dielectric strength :min 1000VRMX

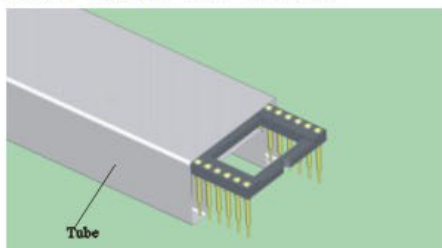


7110-301XXSXXXXXXXXXX



7110-303XXSXXXXXXXXXX



7110-302XXSXXXXXXXXXX



7110-304XXSXXXXXXXXXX

7110-30 X XX S XX XXX X X

ROW OF PITCH
 1:7.62 2:15.24
 3:10.16 5:22.86

NO. OF PINS
 6~64


CONTACT PLATING
 S0:1u" Gold/Tin S4:15u"Gold/Tin
 S1:3u" Gold/Tin S5:30u"Gold/Tin
 S2:5u" Gold/Tin S6:20u"Gold/Tin
 S3:10u"Gold/Tin SN:Tin

LENGTH OF TERMINAL

PACKING
 A:Tray T:Tube
 R:Tape & Reel
 O: PE Bag

ROW PITCH DIM "L"	DIM "W"
7.62	4/6/8/10/12/14/16/18/20/22/24/28
10.16	12.60/20/22/24/28/32
15.24	10/17.70/24/28/32/36/40/42/48/50/52
22.86	25.30

DIM "H"
6.00mm
7.00mm
8.00mm
10.00mm
11.00mm
12.00mm
13.00mm
15.00mm
18.00mm
33.00mm

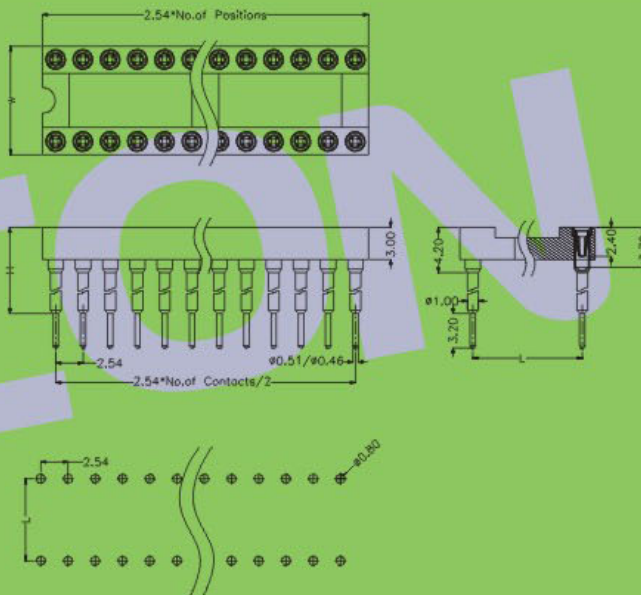

Recommended P. C. B Layout (top side)

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418