



CONTACT CLIP





SLEEVE


2.54mm IC Socket

SPECIFICATIONS


Insulator: Black glass filled polyester PBT+30%GF
 Flammability: UL94V-0
 Sleeve: Brass CuZn 36pb3(36000)
 Contact clip(4 finger):Beryllium copper (C17200)
 Mating pin ϕ :0.40 to 0.56mm
 Forces:(polished steel gauge ϕ 0.43mm)
 -Insetion:2.0N typ. -Winthdrawal:1.0N typ.
 Mechanical life :min 100 cycles
 Rated cument:1.0A
 Contact resistance: max 10m Ω
 Dielectric strength :min 1000VRMX

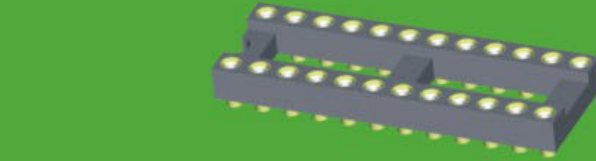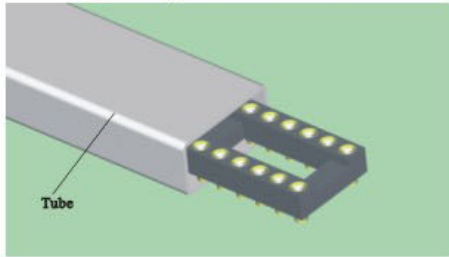

7110-301XXSXXXXXX1



7110-303XXSXXXXXX1

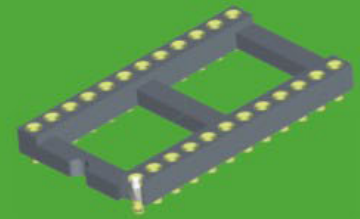

7110-302XXSXXXXXX1

7110-30 X XX S XX 042 X 1


ROW OF PITCH
 1:7.62 2:15.24
 3:10.16

NO.OF PINS
 6~48

CONTACT PLATING
 S0:1u" Gold/Tin S4:15u"Gold/Tin
 S1:3u" Gold/Tin S5:30u"Gold/Tin
 S2:5u" Gold/Tin S6:20u"Gold/Tin
 S3:10u"Gold/Tin SN:Tin

PACKING
 A:Tray T:Tube
 R:Tope & Reel
 O: PE Bag

PART NO.	NO. OF POSITIONS	DIM "A"	ROW PITCH DIM "B"	DIM "C"
7110-30106SXX042X1	06	7.60	7.62	10.10
7110-30108SXX042X1	08	10.10	7.62	10.10
7110-30110SXX042X1	10	12.60	7.62	10.10
7110-30114SXX042X1	14	17.70	7.62	10.10
7110-30116SXX042X1	16	20.30	7.62	10.10
7110-30118SXX042X1	18	22.80	7.62	10.10
7110-30120SXX042X1	20	25.30	7.62	10.10
7110-30122SXX042X1	22	27.80	7.62	10.10
7110-30124SXX042X1	24	30.40	7.62	10.10
7110-30128SXX042X1	28	35.50	7.62	10.10
7110-30320SXX042X1	20	25.40	10.16	12.60
7110-30322SXX042X1	22	27.80	10.16	12.60
7110-30324SXX042X1	24	30.40	10.16	12.60
7110-30328SXX042X1	28	35.50	10.16	12.60
7110-30332SXX042X1	32	40.60	10.16	12.60
7110-30224SXX042X1	24	30.50	15.24	17.70
7110-30228SXX042X1	28	35.50	15.24	17.70
7110-30232SXX042X1	32	40.60	15.24	17.70
7110-30236SXX042X1	36	45.70	15.24	17.70
7110-30240SXX042X1	40	50.80	15.24	17.70
7110-30242SXX042X1	42	53.30	15.24	17.70
7110-30248SXX042X1	48	60.90	15.24	17.70

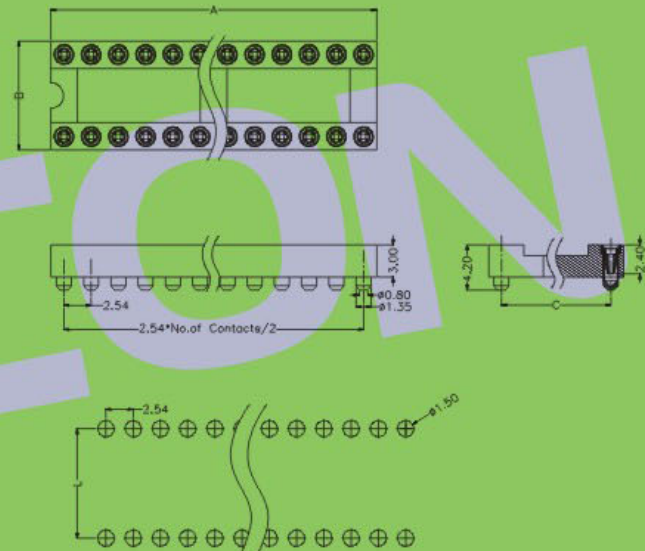

Recommended P. C. B Layout (top side)

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418