


3560-30XXXSXX100X1





3560-30XXXSXX100X2


2.54mm Pin Header

SPECIFICATIONS


Insulator: Black glass filled polyester PBT+30%GF
 Flammability: UL94V-0
 Contact: Brass CuZn 36pb3(36000)
 Connecting pin \varnothing : 0.45/0.48/0.60/0.64mm
 Mechanical life :min 100 cycles
 Rated resistance:1.0A
 Contact resistance: max 10m Ω
 Dielectric strength :min 1000V_{RMS}

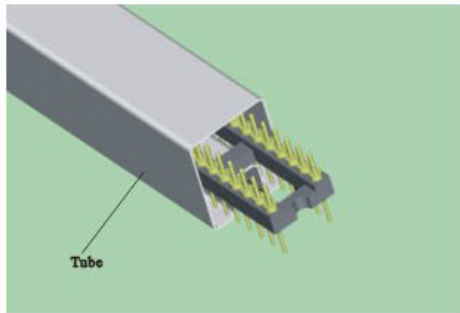

3560-30XXXSXX119X1



3560-30XXXSXX122X1



3560-30XXXSXX137X1

3560-30 X XX S XX XXX X X

ROW OF PITCH
 1:7.62 2:15.24
 3:10.16 5:22.86




NO. OF PINS
 PER ROW
 6~32

CONTACT PLATING
 S0:1u" Gold/Tin S4:15u"Gold/Tin
 S1:3u" Gold/Tin S5:30u"Gold/Tin
 S2:5u" Gold/Tin S6:20u"Gold/Tin
 S3:10u"Gold/Tin SN:Tin

LENGTH OF TERMINAL




PACKING
 A:Tray T:Tube
 R:Tape & Reel
 O: PE Bag

PART NO.	NO. OF POSITIONS	DIM "A"	ROW PITCH DIM "B"	DIM "C"
3560-30106SXXXXX1	06	7.60	7.62	10.10
3560-30108SXXXXX1	08	10.10	7.62	10.10
3560-30110SXXXXX1	10	12.60	7.62	10.10
3560-30112SXXXXX1	12	15.20	7.62	10.10
3560-30114SXXXXX1	14	17.70	7.62	10.10
3560-30116SXXXXX1	16	20.30	7.62	10.10
3560-30118SXXXXX1	18	22.80	7.62	10.10
3560-30120SXXXXX1	20	25.30	7.62	10.10
3560-30122SXXXXX1	22	27.80	7.62	10.10
3560-30124SXXXXX1	24	30.40	7.62	10.10
3560-30128SXXXXX1	28	35.50	7.62	10.10
3560-30320SXXXXX1	20	25.40	10.16	12.60
3560-30322SXXXXX1	22	27.80	10.16	12.60
3560-30324SXXXXX1	24	30.40	10.16	12.60
3560-30328SXXXXX1	28	35.50	10.16	12.60
3560-30332SXXXXX1	32	40.60	10.16	12.60
3560-30224SXXXXX1	24	30.50	15.24	17.70
3560-30228SXXXXX1	28	35.50	15.24	17.70
3560-30232SXXXXX1	32	40.60	15.24	17.70
3560-30236SXXXXX1	36	45.70	15.24	17.70
3560-30240SXXXXX1	40	50.80	15.24	17.70
3560-30242SXXXXX1	42	53.30	15.24	17.70
3560-30248SXXXXX1	48	60.90	15.24	17.70
3560-30250SXXXXX1	50	63.50	15.24	17.70
3560-30252SXXXXX1	52	66.00	15.24	17.70
3560-30650SXXXXX1	50	63.50	22.86	25.30
3560-30652SXXXXX1	52	66.00	22.86	25.30
3560-30654SXXXXX1	64	81.20	22.86	25.30

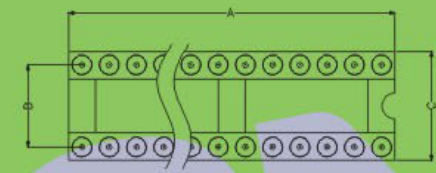

3560-30XXXSXX100X1

3560-30XXXSXX100X2



3560-30XXXSXX119X1 3560-30XXXSXX122X1 3560-30XXXSXX137X1

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418