






## 2.54mm Pin Header

### SPECIFICATIONS


Insulator: Black glass filled polyester PBT+30%GF  
 Flammability: UL94V-0  
 Contact: Brass CuZn 36pb3(36000)  
 Connecting pin $\phi$ : 0.50mm  
 Mechanical life :min 100 cycles  
 Rated resistance:1.0A  
 Contact resistance: max 10m $\Omega$   
 Dielectric strength :min 1000VR<sub>MAX</sub>

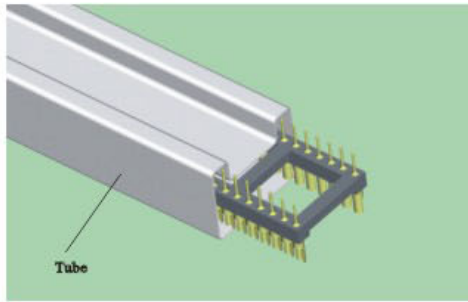


3568-301XXSXX127X1



3568-303XXSXX127X1



3568-302XXSXX127X1



3568-305XXSXX127X1

**3568-30 X XX S XX 127 X 1**


ROW OF PITCH  
 1:7.62 2:15.24  
 3:10.16 5:22.86

NO.OF PINS PER ROW  
 3~32

CONTACT PLATING  
 S0:1u" Gold/Tin S4:15u"Gold/Tin  
 S1:3u" Gold/Tin S5:30u"Gold/Tin  
 S2:5u" Gold/Tin S6:20u"Gold/Tin  
 S3:10u"Gold/Tin SN:Tin

PACKING  
 A:Troy T:Tube  
 R:Tape & Reel  
 Q: PE Bag

PART NO.	NO. OF POSITIONS	DIM "A"	ROW PITCH DIM "B"	DIM "C"
3568-30106SXX127X1	06	7.60	7.62	10.10
3568-30108SXX127X1	08	10.10	7.62	10.10
3568-30110SXX127X1	10	12.60	7.62	10.10
3568-30112SXX127X1	12	15.20	7.62	10.10
3568-30114SXX127X1	14	17.70	7.62	10.10
3568-30116SXX127X1	16	20.30	7.62	10.10
3568-30118SXX127X1	18	22.80	7.62	10.10
3568-30120SXX127X1	20	25.30	7.62	10.10
3568-30122SXX127X1	22	27.80	7.62	10.10
3568-30124SXX127X1	24	30.40	7.62	10.10
3568-30128SXX127X1	28	35.50	7.62	10.10
3568-30320SXX127X1	20	25.40	10.16	12.60
3568-30322SXX127X1	22	27.80	10.16	12.60
3568-30324SXX127X1	24	30.40	10.16	12.60
3568-30328SXX127X1	28	35.50	10.16	12.60
3568-30332SXX127X1	32	40.60	10.16	12.60
3568-30224SXX127X1	24	30.50	15.24	17.70
3568-30228SXX127X1	28	35.50	15.24	17.70
3568-30232SXX127X1	32	40.60	15.24	17.70
3568-30236SXX127X1	36	45.70	15.24	17.70
3568-30240SXX127X1	40	50.80	15.24	17.70
3568-30242SXX127X1	42	53.30	15.24	17.70
3568-30248SXX127X1	48	60.90	15.24	17.70
3568-30250SXX127X1	50	63.50	15.24	17.70
3568-30252SXX127X1	52	66.00	15.24	17.70
3568-30550SXX127X1	50	63.50	22.86	25.30
3568-30552SXX127X1	52	66.00	22.86	25.30
3568-30564SXX127X1	64	81.20	22.86	25.30

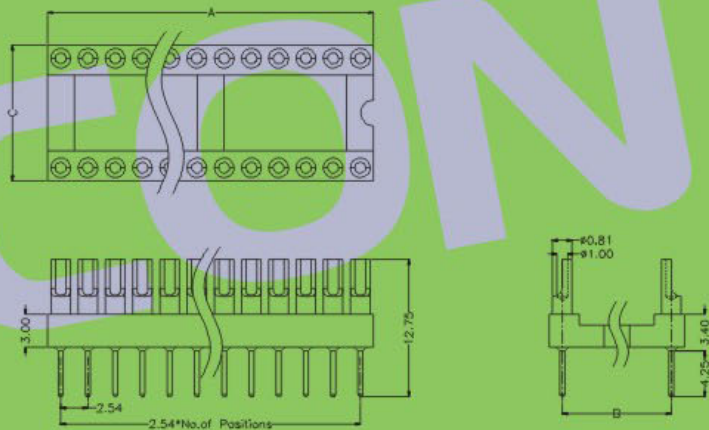

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920  
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418