



CONTACT


2. 54mm Pin Header

SPECIFICATIONS


Insulator: Black glass filled epvester PBT+30%GF
 Flammability: UL94V-0
 Contact: Brass CuZn 36pb3(36000)
 Connecting pin ϕ : 0.50mm
 Mechanical life :min 100 cycles
 Rated resistance:1.0A
 Contact resistance: max 10m Ω
 Dielectric strength :min 1000V_{RMX}
 Coplanarity SMD terminations: max0.1mm




FILE NO.E240993

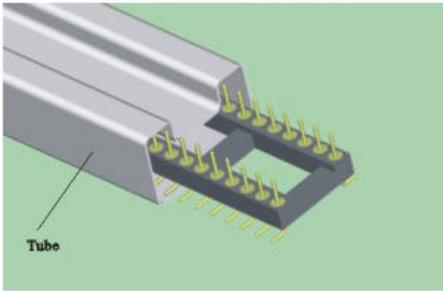


Tube



3560-301XXMXX102X1



3560-303XXMXX102X1



3560-302XXMXX102X1

3560-30 X XX M XX 102 X 1


ROW OF PITCH
 1:7.62 2:15.24
 3:10.16

NO.OF PINS
 PER ROW
 3~24

CONTACT PLATING
 S0:1u" Gold/Tin S4:15u"Gold/Tin
 S1:3u" Gold/Tin S5:30u"Gold/Tin
 S2:5u" Gold/Tin S6:20u"Gold/Tin
 S3:10u"Gold/Tin SN:Tin

PACKING
 A:Tray T:Tube
 R:Tape & Reel
 Q: PE Bag

PART NO.	NO. OF POSITIONS	DIM "A"	ROW PITCH DIM "B"	DIM "C"	DIM "D"
3560-30106MXX102X1	06	7.60	7.62	10.10	12.30
3560-30108MXX102X1	08	10.10	7.62	10.10	12.30
3560-30110MXX102X1	10	12.60	7.62	10.10	12.30
3560-30112MXX102X1	12	15.20	7.62	10.10	12.30
3560-30114MXX102X1	14	17.70	7.62	10.10	12.30
3560-30116MXX102X1	16	20.30	7.62	10.10	12.30
3560-30118MXX102X1	18	22.80	7.62	10.10	12.30
3560-30120MXX102X1	20	25.30	7.62	10.10	12.30
3560-30122MXX102X1	22	27.80	7.62	10.10	12.30
3560-30124MXX102X1	24	30.40	7.62	10.10	12.30
3560-30128MXX102X1	28	35.50	7.62	10.10	12.30
3560-30320MXX102X1	20	25.40	10.16	12.60	14.84
3560-30322MXX102X1	22	27.80	10.16	12.60	14.84
3560-30324MXX102X1	24	30.40	10.16	12.60	14.84
3560-30328MXX102X1	28	35.50	10.16	12.60	14.84
3560-30332MXX102X1	32	40.60	10.16	12.60	14.84
3560-30224MXX102X1	24	30.50	15.24	17.70	19.92
3560-30228MXX102X1	28	35.50	15.24	17.70	19.92
3560-30232MXX102X1	32	40.60	15.24	17.70	19.92
3560-30236MXX102X1	36	45.70	15.24	17.70	19.92
3560-30240MXX102X1	40	50.80	15.24	17.70	19.92
3560-30242MXX102X1	42	53.30	15.24	17.70	19.92
3560-30248MXX102X1	48	60.90	15.24	17.70	19.92

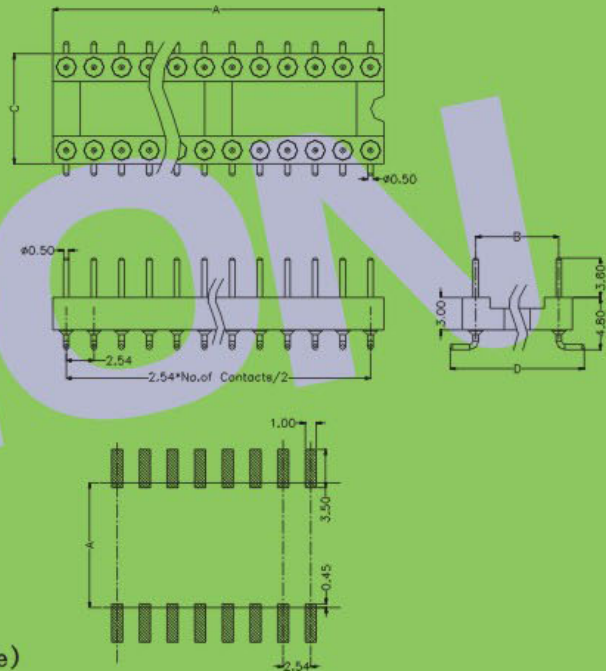

Recommended P. C. B Layout (top side)

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418