

# HSP

**TECHNICAL SPECS:**

Current Rating: 1.0AMP  
 Contact Resistance: 10mΩ Max  
 Dielectric Strength: Min 1000Vrms  
 Mechanical Life: Min 500 cycles  
 Operation Temperature: -40°C to +105°C




Sleeve: Brass CuZn36Pb3(C36000)  
 Connecting Pin:  $\phi 0.41$ mm  
 Contact plating: Au or Sn over Ni  
 Insulator Material: PPS+30%G.F.(UL94V-0)

## Ordering Information

3515-192 XX S XX 081 X 1

No. of Pin: 2-50PIN  
 Contact Plating:  
 G0=Gold Flash  
 G1=3u"Gold  
 G2=5u"Gold  
 G3=10u"Gold  
 G4=15u"Gold  
 G5=30u"Gold  
 S0=Gold Flash/Tin  
 S1=3u"Gold/Tin  
 S2=5u"Gold/Tin  
 S3=10u"Gold/Tin  
 S4=15u"Gold/Tin  
 S5=30u"Gold/Tin  
 SN=Tin

Packing:  
 A=Tray  
 T=Tube

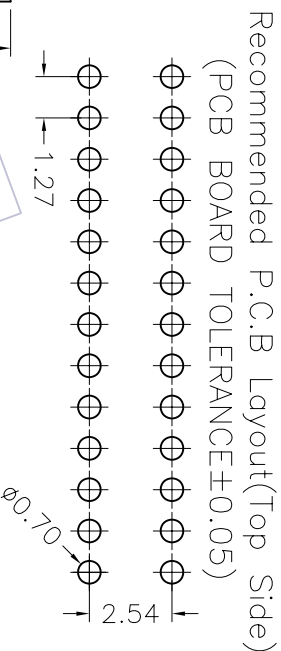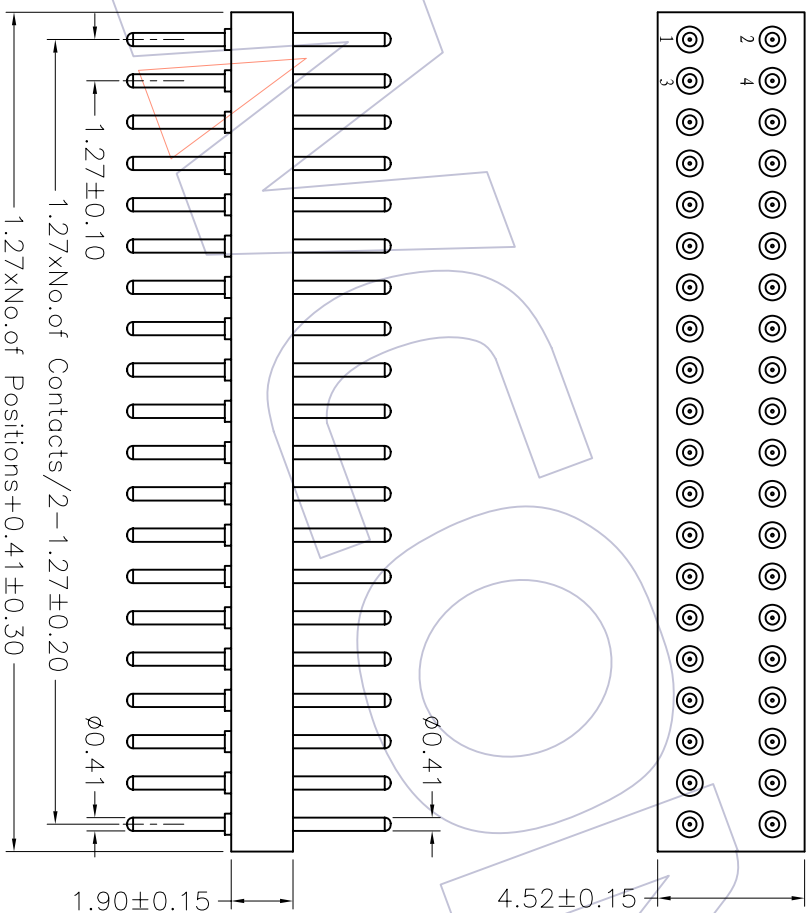

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	WEIXD	08/10/17	SCALE		PART NO.	TITLE:
					XXX	$\pm 0.30$				UNIT	1:1		
A0	08/10/17	NEW			XXX	$\pm 0.20$	DESIGN			mm	A4	3515-192XXSX081X1	1.27x2.54mm MACHINED PIN HEADER DUAL ROW 180° H=1.90 L=8.1
					Angle	$\pm 3'$	CHECK				1/1		
					DIM	TOL	APPROVE					Customer NO.	

**WCON** 维峰五金电子有限公司  
 WAVE HARDWARE ELECTRONICS CO.,LTD