

HSP

TECHNICAL SPECS:

Current Rating: 1.0AMP
 Contact Resistance: 10mΩ Max
 Dielectric Strength: Min 1000Vrms
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C356000)
 Connecting Pin: $\phi 0.41$ mm
 Contact plating: Au or Sn over Ni
 Insulator Material: PPS+30%G.F.(UL94V-0)




Ordering Information

3514-193 XX R XX 103 X 1

No. of Pin
 2-50PIN

Contact Plating
 G0=Gold Flash
 G1=3u"Gold
 G2=5u"Gold
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S1=3u"Gold/Tin
 S2=5u"Gold/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin

Packing
 A=Tray
 T=Tube

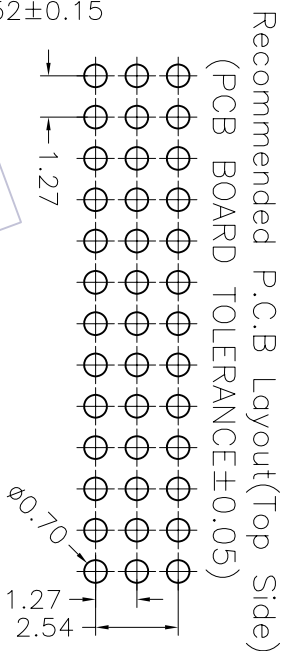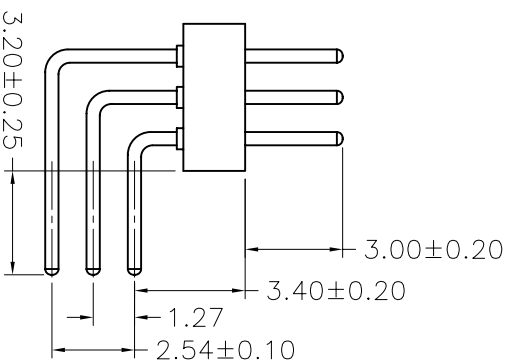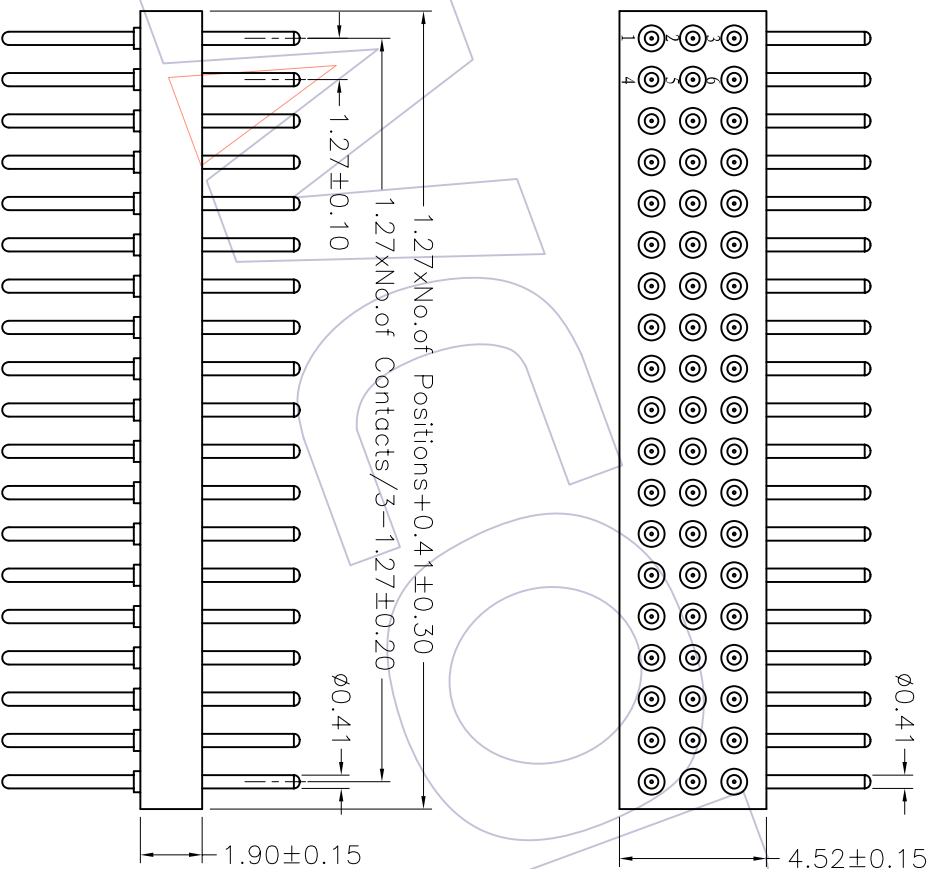

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	WEIXD	08/10/17	SCALE		PART NO.	TITLE:
					XXX	±0.30				UNIT	1:1		
A0	08/10/17	NEW			XXX	±0.20	DESIGN			mm	A4	3514-193XXRX103X1	1.27mm MACHINED PIN HEADER THREE ROW 90° H=1.90 L=10.3
					XXX	±0.10	CHECK				1/1		
					Angle	± 3'	APPROVE					Customer NO.	

WCON 维峰五金电子有限公司
 WAVE HARDWARE ELECTRONICS CO.,LTD