

5130-XXRMDNX01





5130-XXRMDNX02

1. 00mm FPC Connector


SPECIFICATIONS



Current Rating: 0.75AMP
 Contact Resistance: 30m Ω Max.
 Insulation Resistance: 1000M Ω Min.
 Withstanding Voltage : 500V AC/Minute
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze
 Contact plating: Tin Plated
 Insulator Material: Polyester (UL94V-0)
 StandArd: PA6T+ 30%GF

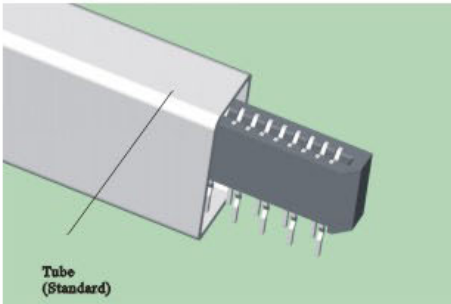

5130-XXSMDNX01





5130-XXSDDNX01



5130-XXRDDNX01

5130-XX X X D N X 0X

NO. OF PINS PER ROW 05~34P	CONTACT SHAPE S: Straight R: Right Angle	SOLDER TYPE D: DIP M: SMT	INSULATOR COLOUR B: Black W: White E: Beige A: Brown
-------------------------------	--	---------------------------------	--

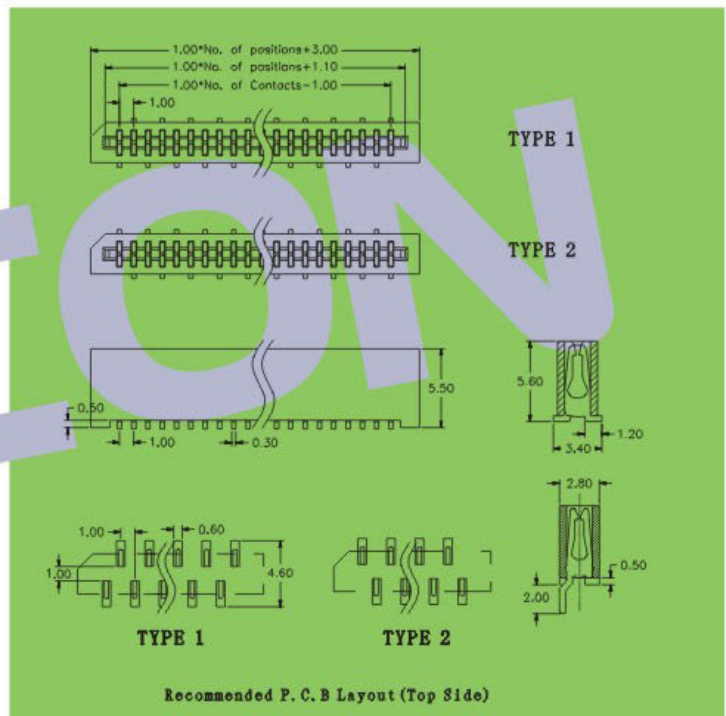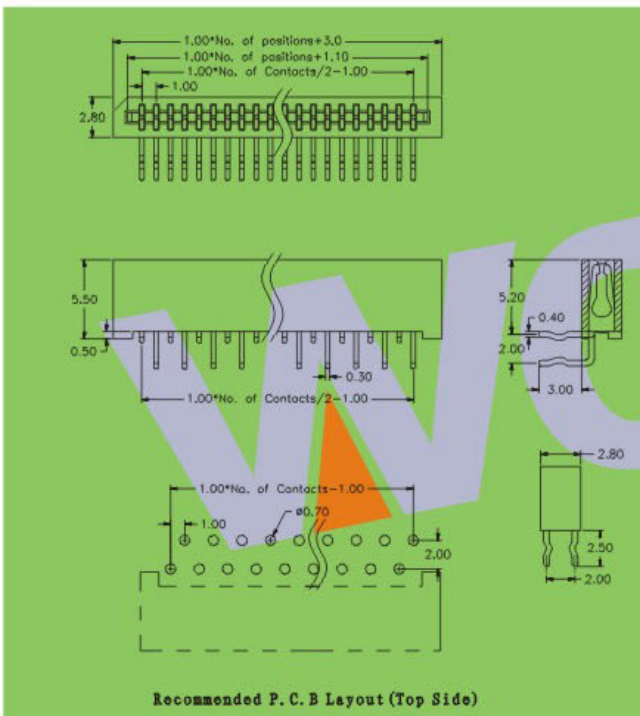

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418