WCON®
HTTP:WWW.WAFE-CHINA.COM

1.25mm FPC Connector

SPECIFICATIONS

FILE NO.E248993

Current Rating: 0.75AMP
Contact Resistance: 30mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage : 500V AC/Minute
Operation Temperature: −40°C to+105°C
Contact Material: Phosphor Bronze
Contact plating: Tin Plated
Insulator Material: Polyester (UL94V−0)
StandArd: PA6T+30%GF

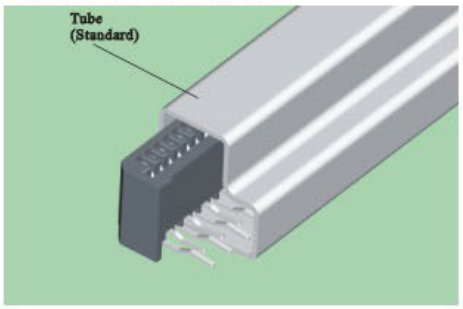



5120-XXSSLDNX01



5120-XXRSDBNX01



5120-XXRSDUNX01

5120-XX X D X N X 01

- XX: NO.OF PINS PER ROW 05~34P
- X: CONTACT SHAPE S:Straight R:Right Angle
- X: CONTACT TYPE U:Up contact B:Bottom contact L:Left contact
- X: INSULATOR COLOUR B:Black W:White E:Beige A:Brown

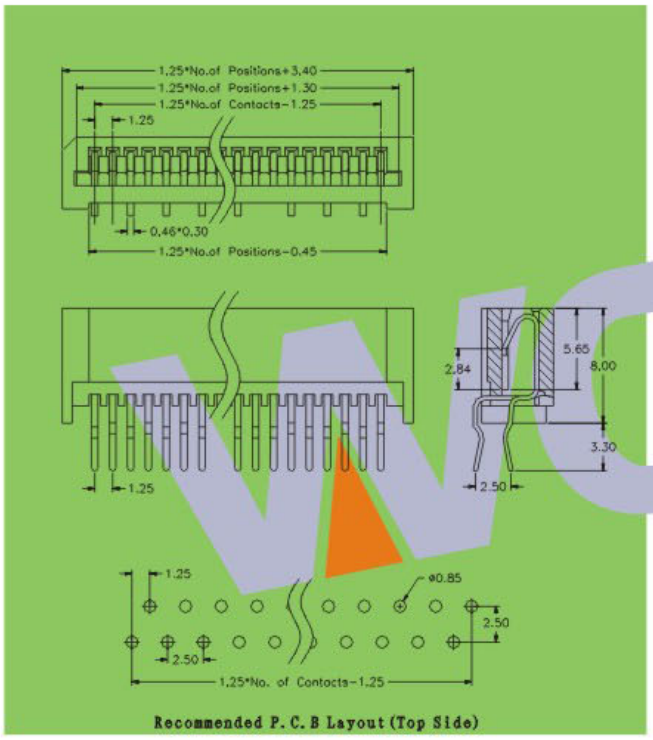

Recommended P. C. B Layout (Top Side)

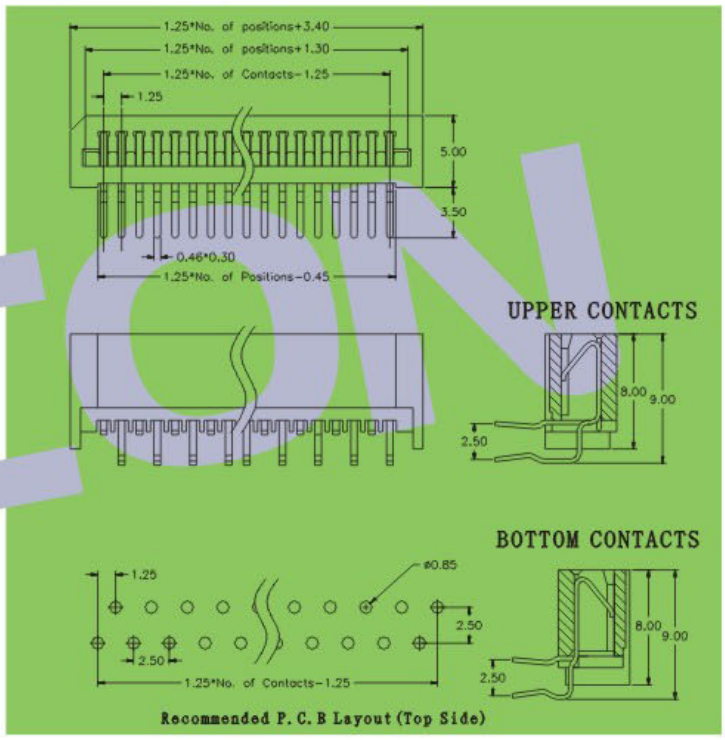

Recommended P. C. B Layout (Top Side)

WCON

※ ※INNOVATION AND DEVELOPMENT ※ ※CONTINUAL IMPROVEMENT ※ ※QUALITY FOREMOST ※ ※CUSTOMER SATISFACTION ※ ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com
WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418