


# Mini Din Connector

## SPECIFICATIONS




Current Rating: 1.0AMP  
 Contact Resistance: 30m Ω Max.  
 Insulation Resistance: 3000M Ω Min.  
 Withstanding Voltage : 500V AC/Minute  
 Operation Temperature: -55°C to +105°C  
 Contact Material: Phosphor Bronze/Brass  
 Contact plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PBT+30%GF  
 Shell : Brass, Ni /Tin/Au Plated

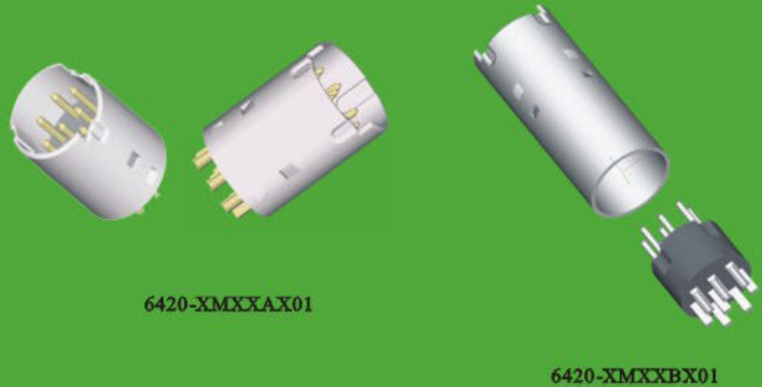

**6420- X X XX X X 01**

NO. OF PINS	TYPE M: Male F: Female	CONTACT PLATING G0: 1u" Gold G1: 3u" Gold G2: 5u" Gold G3: 10u" Gold G4: 15u" Gold G5: 30u" Gold G6: 20u" Gold SN: Tin	CONTACT SHAPE A: Moulded B: Assembly C: DIP	INSULATOR COLOR B: Black U: Blue N: Green
		S0: 1u" Gold/Tin S1: 3u" Gold/Tin S2: 5u" Gold/Tin S3: 10u" Gold/Tin S4: 15u" Gold/Tin S5: 30u" Gold/Tin S6: 20u" Gold/Tin		

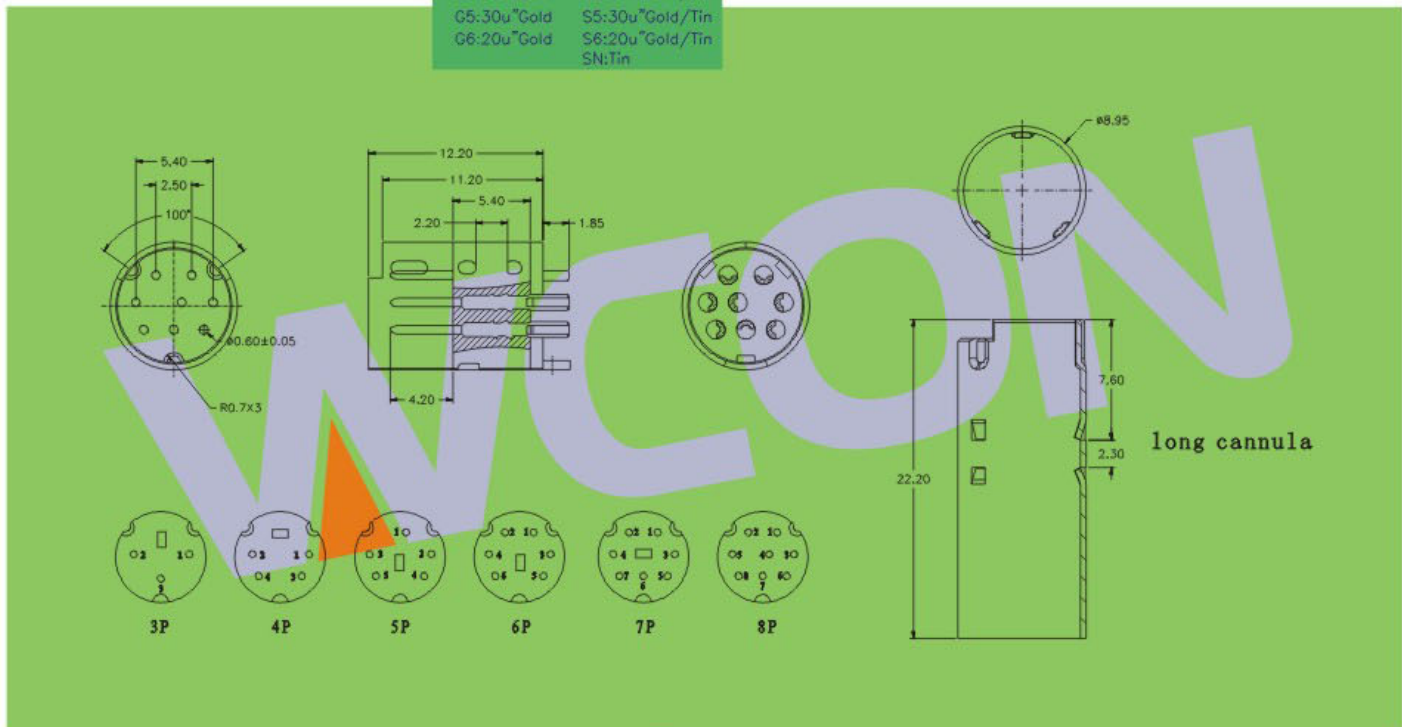

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※