


Mini Din Connector

SPECIFICATIONS



Current Rating:1.5AMP
 Contact Resistance:20m Ω Max.
 Insulation Resistance:1000M Ω Min.
 Withstanding Voltage :500V AC/Minute
 Operation Temperature:-55°C to+105°C
 Contact Material:Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material:Polyester (UL94V-0)
 Standard:PBT+30%GF
 Shell :Brass,Ni /Tin/Au Plated

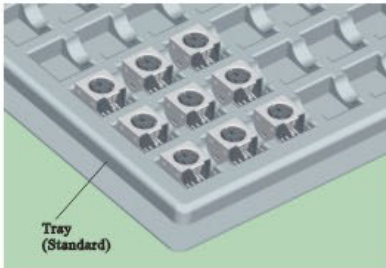

6420-XFXXCX01

6420- X F XX C X 01


NO.OF PINS

CONTACT PLATING

INSULATOR COLOR

G0:1u" Gold	S0:1u" Gold/Tin
G1:3u" Gold	S1:3u" Gold/Tin
G2:5u" Gold	S2:5u" Gold/Tin
G3:10u"Gold	S3:10u"Gold/Tin
G4:15u"Gold	S4:15u"Gold/Tin
G5:30u"Gold	S5:30u"Gold/Tin
G6:20u"Gold	S6:20u"Gold/Tin
	SN:Tin

B:Black U:Blue
 N:Green

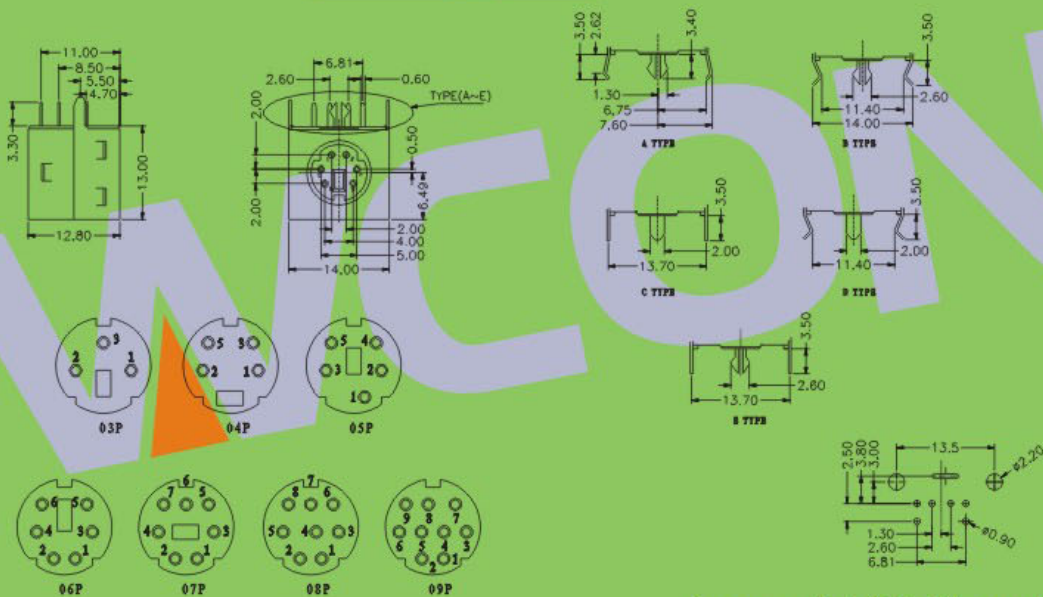

Recommended P. C. B Layout (top side)

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418