



6222-XXMXXB02

# D-SUB Connector Straight


## SPECIFICATIONS



Current Rating: 3.0AMP  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : 500V AC/Minute  
 Operation Temperature: -55°C to +105°C  
 Contact Material: Phosphor Bronze/Brass  
 Contact plating: Au or Tin Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PBT+30%GF  
 Shell: Cold Roller Steel ,Ni Plated  
 Nut: Brass ,Tin Over Ni Plated

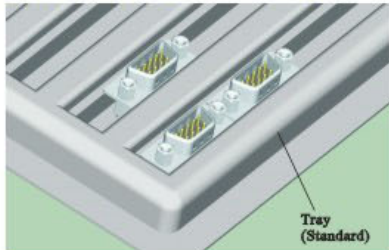

6222-XXMXXB01



6222-XXFXXB02



6222-XXFXXB01



## 6222- XX X XX X 0X

NO.OF PINS  
9,15,25,37P

TYPE  
M:Male  
F:Female

CONTACT PLATING  
 G0:1u" Gold S0:1u" Gold/Tin  
 G1:3u" Gold S1:3u" Gold/Tin  
 G2:5u" Gold S2:5u" Gold/Tin  
 G3:10u"Gold S3:10u"Gold/Tin  
 G4:15u"Gold S4:15u"Gold/Tin  
 G5:30u"Gold S5:30u"Gold/Tin  
 G6:20u"Gold S6:20u"Gold/Tin  
 SN: Tin



INSULATOR COLOR  
 B:Black W:White  
 U:Blue G:Grey

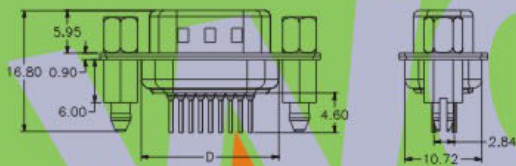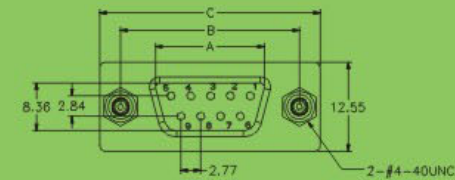

No. of Positions	DIM "A"	DIM "B"	DIM "C"	DIM "D"
9	16.92	24.99	30.81	19.28
15	25.25	33.32	39.14	27.65
25	38.96	47.04	53.04	41.30
37	55.42	63.50	69.32	57.44



Recommended P. C. B Layout (Top Side)

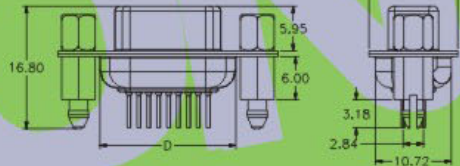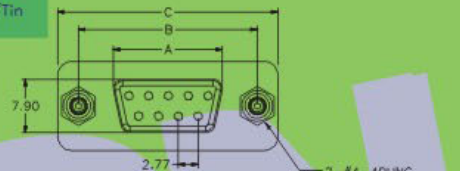

No. of Positions	DIM "A"	DIM "B"	DIM "C"	DIM "D"
9	16.33	24.99	30.81	19.28
15	24.66	33.32	39.14	27.65
25	38.38	47.04	53.04	41.30
37	54.84	63.50	69.32	57.44



Recommended P. C. B Layout (Top Side)

※ INNOVATION AND DEVELOPMENT ※ CONTINUAL IMPROVEMENT ※ QUALITY FOREMOST ※ CUSTOMER SATISFACTION ※

Http:www.wafe-china.com E-mail:sales@wafe-china.com

WAFE DONGGUAN FAX:+86 769 85358915 TEL:+86 769 85358920  
 WAFE KUNSHAN FAX:+86 512 57468468 TEL:+86 512 57468418